

jc586 U.S. PTO

A

Express Mail Label No. EJ606947920US

U.S. PRO  
09/412900  
10/05/99

ASSISTANT COMMISSIONER FOR PATENTS  
Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing is the patent application of

Kurumi Mori, 12-12, Kurihara 1-chome, Asao-ku, Kawasaki-shi, Kanagawa-ken, Japan

**Enclosed are:**

[X] 16 sheets of drawing [X] formal [ ] informal

- ☐ Unsigned
- ☐ Newly Executed
- ☐ Copy from prior application

☐ Deletion of inventors including Signed Statement under 37 C.F.R. § 1.63(d)(2)

[ ] Microfiche Computer Program (Appendix)

[ ] computer readable disk containing Sequence Listing  
[ ] Statement under 37 C.F.R. § 1.821(f) that computer and paper copies of the Sequence Listing are the same

[ ] Certified copy of Priority Document(s)

- ☐ English translation documents
- ☐ Information Disclosure Statement
- ☐ Copy of    cited references w/ English Abstracts
- ☐ Copy of PTO-1449 filed in parent application serial No.                     .
- ☒ Preliminary Amendment
- ☒ Return receipt postcard (MPEP 503)
- ☐ Assignment Papers (assignment cover sheet and assignment documents)
- ☐ A check in the amount of \$40.00 for recording the Assignment.
- ☐ Assignment papers filed in parent application Serial No.                                     .
- ☐ Certification of chain of title pursuant to 37 C.F.R. § 3.73(b).
- ☐ This is a ☐ continuation ☐ divisional ☐ continuation-in-part (C-I-P) of prior application serial no.                     .
- ☐ Cancel in this application original claims                      of the parent application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☐ A preliminary Amendment is enclosed. (Claims added by this Amendment have been properly numbered consecutively beginning with the number following the highest numbered original claim in the prior application.
- ☐ The status of the parent application is as follows:
- ☐ A Petition For Extension of Time and a Fee therefor has been or is being filed in the parent application to extend the term for action in the parent application until                                     .
- ☐ A copy of the Petition for Extension of Time in the co-pending parent application is attached.
- ☐ No Petition For Extension of Time and Fee therefor are necessary in the co-pending parent application.
- ☐ Please abandon the parent application at a time while the parent application is pending or at a time when the petition for extension of time in that application is granted and while this application is pending has been granted a filing date, so as to make this application co-pending.
- ☐ Transfer the drawing(s) from the patent application to this application.
- ☐ Amend the specification by inserting before the first line the sentence:  
This is a ☐ continuation ☐ divisional ☐ continuation-in-part of co-pending application Serial No.                      filed                     .

## I. CALCULATION OF APPLICATION FEE (For Other Than A Small Entity)

	Number Filed		Number Extra	Rate	Basic Fee
					\$ 760.00
Total Claims	33	-20=	13	x\$18.00	\$ 234.00
Independent Claims	7	- 3=	4	x78.00	\$ 312.00
Multiple Dependent Claims					
	[ ] yes		Additional Fee =	\$260.00	\$
	[ X ] no		Add'l Fee =	NONE	

Total: \$1,306.00

[ ] A statement claiming small entity status is attached or has been filed in the above-identified parent application and its benefit under 37 C.F.R. § 1.28(a) is hereby claimed. Reduced fees under 37 C.F.R. § 1.9(F) (50% of total) paid herewith \$ \_\_\_\_\_.


[ X ] A check in the amount of \$1,306.00 for payment of the application filing fees is attached.

[ ] Charge Fee(s) to Deposit Account No. 13-4500. Order No. \_\_\_\_\_. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

[ X ] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required for filing this application, or credit any overpayment to Deposit Account No. 13-4500, Order No. 1232-4577. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

Respectfully submitted,

MORGAN &amp; FINNEGAN, L.L.P.

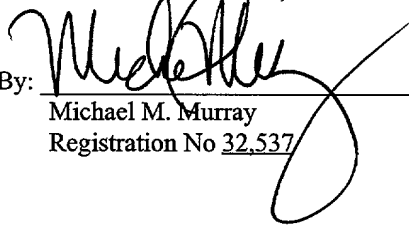By:   
 Michael M. Murray  
 Registration No 32,537

Dated: October 5, 1999

CORRESPONDENCE ADDRESS  
 MORGAN & FINNEGAN, L.L.P.  
 345 Park Avenue  
 New York, New York 10154  
 (212) 758-4800  
 (212) 751-6849 Facsimile

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Kurumi Mori

Serial No. : To Be Assigned Examiner: To Be Assigned

Filed : October 5, 1999 (Herewith) Group Art Unit: TBA

For : Information Communication Apparatus and Method, Information  
Communication System, and Memory Medium

EXPRESS MAIL CERTIFICATE

Express Mail Label No. EJ606947920US

Date of Deposit October 5, 1999

I hereby certify that the following attached paper(s) and/or fee  
Application Fee Transmittal (in duplicate); 51 pp. of specs., 1 page of abstract, 7 Pp. claims (33 TOTAL  
claims); 16 Sheets of Formal Drawings (Figs. 1-19); check in the amount of \$1,306.00; Preliminary  
Amendment; and return receipt postcard


is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37

C.F.R. §1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box New

Applications, Washington, D.C. 20231.

Sandina M. Marino

Typed or printed name of person  
mailing paper(s) and/or fee)

  
(Signature of person mailing  
paper(s) and/or fee)

CORRESPONDENCE ADDRESS:  
MORGAN & FINNEGAN, L.L.P.  
345 Park Avenue  
New York, New York 10154  
(212) 758-4800  
(212) 751-6849 Facsimile

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicants : Kurumi Mori  
Serial No. : To Be Assigned Examiner: To Be Assigned  
Filed : October 5, 1999 (Herewith) Group Art Unit: TBA  
For : Information Communication Apparatus and Method, Information  
Communication System, and Memory Medium

**Hon. Assistant Commissioner of Patents  
Washington, D.C. 20231**

**PRELIMINARY AMENDMENT**

Sir:

Prior to examination on the merits of the above application, please amend the  
above-identified application as follows:

**IN THE CLAIMS**

Claim 19, line 3, please delete "any of claims 1-6" and insert therefor -- claim 1 --.

Claim 20, line 3, please delete "any f claims 7-12" and insert therefor -- claim 7 --.

Please add the following claims:

-- 24. (New) A computer readable memory medium storing a program for  
functioning a computer as means described in claim 2.

25. (New) A computer readable memory medium storing a program for  
functioning a computer as means described in claim 3.

26. (New) A computer readable memory medium storing a program for  
functioning a computer as means described in claim 4.

27. (New) A computer readable memory medium storing a program for functioning a computer as means described in claim 5.

28. (New) A computer readable memory medium storing a program for functioning a computer as means described in claim 6.

29. (New) A computer readable memory medium storing a program for functioning a computer as means described in claim 8.

30. (New) A computer readable memory medium storing a program for functioning a computer as means described in claim 9.

31. (New) A computer readable memory medium storing a program for functioning a computer as means described in claim 10.

32. (New) A computer readable memory medium storing a program for functioning a computer as means described in claim 11.


33. (New) A computer readable memory medium storing a program for functioning a computer as means described in claim 12. --

**REMARKS**

Entry of this amendment prior to examination on the merits is respectfully requested.

Respectfully submitted,  
Morgan & Finnegan, L.L.P.

Date: October 5, 1999

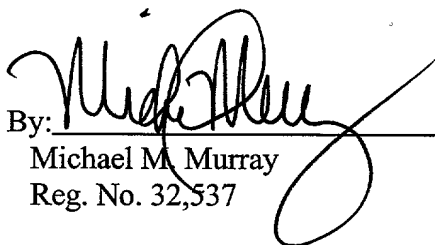By:   
Michael M. Murray  
Reg. No. 32,537

**MAILING ADDRESS:**  
MORGAN & FINNEGAN, L.L.P.  
345 Park Avenue  
New York, New York 10154  
(212) 758-4800 Telephone

INFORMATION COMMUNICATION APPARATUS AND METHOD,  
INFORMATION COMMUNICATION SYSTEM,  
AND MEMORY MEDIUM

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an information  
communication apparatus having cipher processing  
function, a method, an information communication system  
10 and a memory medium therefor.

Related Background Art

The information communication apparatus,  
represented by mobile communication terminal, has shown  
remarkable progress in compactization, higher  
15 performance and higher speed in information processing,  
and there are already commercialized mobile  
communication terminals that are comparable in  
performance to the desk-top computers. Because of such  
tendency, the mobile communication terminals are  
20 rapidly becoming popular in the business field, in  
enabling rapid information exchange by wireless  
communication even when one is not in the office. In  
such form of communication, the leak of secrecy is  
always a major concern. Therefore the corporations  
25 engaged in the development of the information  
communication apparatus are actively the development of  
cipher process technology of the transmitted information.

09412900.100593

On the other hand, the amount of the processed information is rapidly growing, such as taking, fetching and transmitting the digital image in the communication function, and the performance required for the information signal processing unit will become even larger, as the moving image will also be processed in the future. Furthermore, the mobile communication terminal integrating the digital camera for image fetching has been recently commercialized and the mobile communication terminal including the digital video camera will also appear in the near future.

However, because of such advancement in the performance of the mobile information terminal, it is increasingly becoming difficult to achieve compactization important for mobility, in comparison with the conventional products provided solely with the communication function of the information editing function. In order to additionally include the cipher process in the above-described situation, it is important not only to increase the information processing speed but also to reduce the dimension of the entire information communication apparatus including the cipher processing device.

As explained in the foregoing, the current issues associated with the information communication apparatus are the cost increase resulting from the increase in the performance, the enormous increase in the amount of

00500T 00521450



information to be handled, including images, and the difficulty in compactization particularly in the mobile terminal or the like.

Also the apparatus capable of cipher process is recently attracting attention, and various communication apparatus with the enciphering means are expected to be commercialized in the future. On the other hand, in the home use, the level of secrecy of the information to be handled is relatively low, so that the enciphering process may not be essential. However, if the enciphered information is always transmitted, the receiving side has to be equipped with the deciphering device for reading the enciphered information. As a result, the increase in the dimension of the apparatus, in the cost and in the burden for the information processing is unavoidable in the transmitting side and in the receiving side.

#### SUMMARY OF THE INVENTION

The object of the present invention is to resolve such difficulties, and to achieve reduction in the dimension, the cost and the burden for the information processing in the mobile information terminal, while taking the information enciphering process in consideration.

The above-mentioned object can be attained, according to an embodiment of the present invention, by

an information communication apparatus comprising  
enciphering means for the transmission information, and  
cipher process selection means for selecting whether or  
not to use the enciphering means in executing  
5 communication of information.

The cipher process selection means mentioned above  
may be provided with designation means for designating  
whether or not to execute enciphering of the  
transmission information, and the enciphering means may  
10 be used or not according to the designation by the  
information transmitting person.

Also the cipher process selection means mentioned  
above may be provided with medium discrimination means  
for discriminating the communication medium connecting  
15 the information transmitting apparatus and the  
information receiving apparatus, and the enciphering  
means may be used or not according to the communication  
medium employed.

Furthermore, the cipher process selection means  
20 mentioned above may be provided with cipher permission  
discrimination means for discriminating whether the  
information receiving apparatus is capable of  
deciphering the cipher, and the enciphering means may  
be used or not according to the result of such  
25 discrimination.

Furthermore, the cipher process selection means  
mentioned above may be provided with secrecy level

555001 0052160

discrimination means for discriminating the level of secrecy of the transmission information, and the enciphering means may be used or not according to the result of such discrimination.

5           According to another embodiment of the present invention, there is provided an information communication apparatus comprising cipher discrimination means for discriminating whether the reception information is enciphered, and error process  
10 means for executing a predetermined error process in case the cipher discrimination means identifies that the reception information is enciphered.

          Also the information communication method of the present invention is featured, in executing  
15 communication of information, by selecting whether or not to use the enciphering process for the transmission information.

          Also whether or not to use the enciphering process for the transmission information may be selected  
20 according to the designation by the information transmitting person.

          Furthermore, whether or not to use the enciphering process for the transmission information may be selected according to the communication medium  
25 employed, among different communication media enabling communication between the information transmitting apparatus and the information receiving apparatus.

00412500-100539  
00500T-00521460

Furthermore, whether or not to use the enciphering process for the transmission information may be selected according to the result of discrimination whether the deciphering is possible in the information receiving apparatus.

Furthermore, whether or not to use the enciphering process for the transmission information may be selected according to the level of secrecy of the transmission information.

Another embodiment of the present invention is featured by discriminating whether the reception information is enciphered, and, if enciphered, executing a predetermined error process.

According to the present invention, there is also provided an information communication system comprising an information transmitting apparatus including enciphering means for the transmission information and cipher process selection means for selecting whether or not to use the enciphering means at the execution of communication of information, and an information receiving apparatus including decoding means for decoding non-ciphered reception information, cipher discrimination means for discriminating whether the reception information is enciphered, and error process means for executing a predetermined error process in case the reception information is identified as being enciphered.

According to another embodiment of the present invention, the information communication system comprises an information transmitting apparatus including enciphering means for the transmission  
5 information and cipher process selection means for selecting whether or not to use the enciphering means at the execution of communication of information, and an information receiving apparatus including cipher discrimination means for discriminating whether the  
10 reception information is enciphered and decoding means for decoding the enciphered reception information in case the reception information is identified as being enciphered.

According to the present invention, there is also  
15 provided a computer readable memory medium storing a program serving as means in any of claims 1 to 6 for causing a computer to function.

In another embodiment of the present invention, the computer readable memory medium is featured by  
20 storing a program for causing a computer to execute an information communication method according to any of claims 7 to 12.

Still other objects of the present invention, and the features thereof, will become fully apparent from  
25 the following description which is to be taken in conjunction with the attached drawings.

09412300-100593

# BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A and 1B are schematic views showing the configuration of a mobile terminal of the transmitting side and a mobile terminal of the receiving side in an embodiment of the present invention;

Figs. 2A and 2B are flow charts showing the function of the transmitting mobile terminal and the receiving mobile terminal of the above-mentioned embodiment;

Fig. 3 is a flow chart showing the function of the receiving mobile terminal of the embodiment in case it is provided with an enciphering function;

Fig. 4 is a view showing an example of a network system constituted with 1394 serial buses;

Fig. 5 is a view showing constituents of the 1394 serial bus;

Fig. 6 is a view showing the address space in the 1394 serial bus;

Fig. 7 is a cross-sectional view of a cable for the 1394 serial bus;

Fig. 8 is a view showing the DS-Link encoding method in the data transfer format employed in the 1394 serial bus;

Fig. 9 is a view showing an example of the network system constituted with the 1394 serial buses;

Figs. 10A and 10B are views showing an arbitration for acquiring the bus use right;

Fig. 11 is a view showing phase transitions in time in asynchronous transfer;

Fig. 12 is a view showing an example of the packet format in the asynchronous transfer;

5        Fig. 13 is a view showing phase transitions in time in isochronous transfer;

Fig. 14 is a view showing an example of the packet format in the isochronous transfer;

10       Fig. 15 is a view showing transitions in time of the transfer state on the bus where the isochronous transfer and the asynchronous transfer are mixedly present;

15       Fig. 16 is a flow chart showing a general sequence from the bus resetting the node ID determination;

Fig. 17 is a flow chart showing the details of a sequence from the bus resetting to the root determination in the flow chart shown in Fig. 16;

20       Fig. 18 is a flow chart showing the details of a sequence from the root determination to the completion of ID setting in the flow chart shown in Fig. 16; and

Fig. 19 is a flow chart showing the sequence of arbitration.

25

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[First Embodiment]

55500T"00521450

In the following, there will be explained an embodiment of the present invention with reference to the attached drawings.

The present embodiment contemplates, as the  
5 digital I/F for connecting devices, the IEEE 1394 serial bus in addition to the wireless connection. Therefore an explanation will be given in advance on the IEEE 1394 serial bus.

[Outline of IEEE 1394 Serial Bus Technology]

10 With the commercialization of the home-use digital video tape recorder and the DVD, there is being requested a supporting technology for transferring a large amount of data, such as video or audio data, on real-time basis. For transferring such video or audio  
15 data on real-time basis for fetching into a personal computer or transferring to another digital device, there is required an interface provided with required transferring functions and capable of high-speed data transfer. Based on such background, there has been  
20 developed the IEEE 1394 - 1995 (high performance serial bus) which will be hereinafter called the 1394 serial bus.

Fig. 4 shows an example of the network system constituted with the 1394 serial buses. The system is  
25 provided with plural devices A, B, C, D, E, F, G and H, and each of the connections A - B, A - C, B - D, D - E, C - F, C - G and C - H is made with a twisted pair

00521450



cable of the 1394 serial bus. The connection method of the devices allows mixed presence of the daisy chain system and the node branch system, and enables a large freedom in the connection. Examples of the devices

5 A to H are a personal computer, a digital video tape recorder, a DVD, a digital camera, a hard disk, a monitor, etc.

Each device is provided with a specific ID, and the devices mutually recognize the ID's to constitute a  
10 network within the range connected by the 1394 serial buses. By connecting each pair of the digital devices with a single 1394 serial bus cable, each device performs the relaying function and all such devices constitute a single network.

15 Also the plug and play function, featuring the 1394 serial bus, allows the system to automatically recognize the device and the connection status thereof when the cable is connected to the device. Also, when a device is deleted from a system as shown in Fig. 4,  
20 or newly added thereto, the system automatically resets the network configuration and re-constructs the new network. This function allows to always set and recognize the current network configuration.

The 1394 serial bus is provided with data transfer  
25 rates of 100, 200 and 400 Mbps, and the device having a higher transfer rate also supports the lower transfer rate to achieve compatibility between various devices.

65500T"00621460

Also the 1394 serial bus has an asynchronous transfer mode for transferring asynchronous data (hereinafter written as async data) such as control signals, and an isochronous transfer mode for transferring real-time isochronous data (hereinafter written as iso data) such as video or audio data. The async data and the iso data are transferred in mixed manner within each cycle (usually 125  $\mu$ s) succeeding to the transfer of a cycle start packet (CSP) indicating the start of a cycle and giving priority to the transfer of the iso data.

Fig. 5 shows the constituents of the 1394 serial bus.

In general, the 1394 serial bus has a layered configuration. As shown in Fig. 5, a hardware component is represented by the cable of the 1394 serial bus, and there is provided a connector port to which connected is a connector of such cable. A physical layer and a link layer are provided thereon. The hardware part of the 1394 serial bus is practically constituted by an interface chip, in which the physical layer executes encoding and control related to the connector, and the link layer controls the packet transfer and the cycle time.

In a firmware part, a transaction layer manages the data to be transferred (transaction) and issues read and write commands. A serial bus management contained also in the firmware part manages the

connection status of various connected devices and ID's thereof, thereby managing the configuration of the network. Such hardware part and the firmware part practically constitute the 1394 serial bus.

5       An application layer in a software part is variable depending on the software to be used. It also defines the data to be given to the interface and is defined by the protocol such as AV protocol.

10       Fig. 6 shows the address space in the 1394 serial bus.

15       Each device (node) connected to the 1394 serial bus is always given a 64-bit address specific to each device. Such address is stored in a ROM and can be always recognized by the own device or by any other device constituting the communication partner to enable communication with the designated communication partner.

20       The addressing of the 1394 serial bus is executed by a method based on the IEEE 1212 standard. In the above-mentioned address, the initial 10 bits are used for designating the bus number, and the next 6 bits are used for designating the node ID number. The remaining 48 bits constitute the address width assigned for the device and can be used as the specific address space.

25       The last 28 bits within this space are used as a specific data area for storing information for identifying the device and for designating the

09412900.100509  
005001"00521460



5

10

## 15

20

25

layer and also transmits the bus resetting signal to other nodes. The bus resetting is activated after the bus resetting signal is detected by all the nodes.

The bus resetting is activated not only by a hardware detection such as the insertion or extraction of a cable or an abnormality in the network such as explained above, but also by a direct command to the physical layer for example from a host equipment according to the protocol. The data transfer is interrupted with the activation of bus resetting and is restarted, after the bus resetting, under the new network configuration.

[Node ID Determination Sequence]

After the bus resetting, the nodes enter an operation of giving ID's thereto for constructing the new network configuration. The general sequence from the bus resetting to the node ID determination will be explained with reference to flow charts shown in Figs. 16 to 18. The flow chart in Fig. 16 shows a series of bus operations from the generation of bus resetting to the determination of node ID whereupon the data transfer is enabled.

Referring to Fig. 16, at first a step S101 constantly monitors the generation of a bus resetting in the network. When a bus resetting is generated for example by a power on/off operation of the node a step S102 executes declaration of the parent-child

relationship between the directly connected nodes in order to know the connection status of the new network.

5 determines a root node. The declaration of the  
parent-child relationship in the step S102 is repeated  
and the root node is not determined, until the  
parent-child relationship is determined among all the  
nodes. After the root node determination in the step  
10 S104, a step S105 executes a node ID setting operation  
for giving ID to each node.

The node ID setting operation of the step S105 is repeated with a predetermined order of nodes, until all the nodes are given ID's. When a step S106 identifies the completion of ID setting in all the nodes, the new network configuration is recognized by all the nodes to enable data transfer among the nodes, and a step S107 initiates the data transfer. In the state of the step S107, the sequence returns to the step S101 to again assume the mode of monitoring the generation of bus resetting, and, if a bus resetting is generated, the setting operations of the steps S101 to S106 are repeated.

In the foregoing there has been explained the  
25 sequence of the flow chart shown in Fig. 16, and a part  
from the bus resetting to the root determination and a  
part after the root determination to the completion of

ID setting are respectively shown, in more details, in Figs. 17 and 18.

At first there will be explained the flow chart shown in Fig. 17.

5           When a bus resetting occurs in a step S201, the network configuration is once reset. The step S201 constantly monitors the generation of the bus resetting. Then a step S202 sets, in each device, a flag indicating that the device is a leaf (node), as a  
10       first step of the operation for re-recognizing the connection status of the network after resetting. Then, in a step S203, each device checks the number of nodes to which the port of the device is connected.

          According to the result indicating the number of  
15       ports in the step S203, a step S204 checks the number of undefined ports (for which the parent-child relationship is not determined) in order to start the declaration of the parent-child relationship. The number of ports is equal to the number of undefined  
20       ports immediately after the bus resetting, but, the number of undefined ports checked in the step S204 varies with the proceeding of determination of the parent-child relationship.

          Immediately after the bus resetting, the  
25       declaration of the parent-child relationship can be started only from a leaf. A leaf means a node having only one undefined port, and being a leaf can be known

202500T"0002THED



from the confirmation of the number of ports in the step S203. The node recognized in the step S204 as a leaf declares, in a step S205, to a node connected thereto, that "the leaf itself is a child and the partner is a parent", and the sequence is terminated.

In a node having plural ports in the step S203 and recognized as a branch, the step S204 identifies that the number of the undefined ports  $> 1$  immediately after the bus resetting, so that the sequence proceeds to a step S206 in which the node is given a branch flag. Then, in a step S207 it waits to receive the position as parent in the parent-child declaration from a leaf.

The branch receiving the parent-child relationship declaration of the leaf in the step S207 confirms the number of the undefined ports checked in the step S204, and, if the number of the undefined ports has become 1, it can declare that "it is a child" in the step S205 to the node connected to the remaining port. The branch having two or more undefined ports in the step S204 in the second or subsequent cycle waits to receive the position as parent from a leaf or another branch in the step S207.

The declarations of the parent-child relationship is completed in the entire network when the number of the undefined ports checked in the step S204 becomes eventually zero in a branch or exceptionally a leaf (because of a belated declaration of being a child),



sequence is similarly repeated. The leaf having acquired ID transfers, in a step S307, the ID information to all the nodes by broadcasting.

After the broadcasting of the ID information of a node, a step S308 decreases the number of the remaining leaves by one. If a step S309 identifies that at least one leaf remains, the sequence starting from the ID request in the step S303 is repeated for the remaining leaf.

When all the leaves have finally broadcast the ID information, the step S309 identifies  $N = 0$ , whereupon the ID setting shifts to branches. The ID setting for the branches is executed in a similar manner as in the case of leaves. At first a step S310 sets the number  $M$  (being a natural number) of the branches present in the network. Then, in a step S311, each branch requests an ID to the root.

In response, the root executes an arbitration in a step S312, and gives an ID number, next to the numbers already given to the leaves, to a winning node. In a step S313, the root informs the requesting branches with the ID information or the losing results. In a step S314, the branch confirms whether the ID has been acquired, and, if not, returns to the step S311 and issues the request for ID again, and the sequence is similarly repeated. If the ID has been acquired, the branch transfers, in a step S315, the ID information to

all the nodes by broadcasting.

After the broadcasting of the ID information of a node, a step S316 decreases the number of the remaining branches by one. If a step S317 identifies that at least one branch remains, the sequence starting from the ID request in the step S311 is repeated for the next branch. The sequence is executed until the ID information is broadcast from all the branches. When all the branches have finally acquired the ID information, the step S317 identifies  $M = 0$ , whereupon the ID acquisition mode for the branches is terminated.

In this state, the root node only has not acquired the ID information. Thus, in a step S318, the root sets the smallest ungiven number as its own ID number, and a step S319 broadcast the ID information of the root to all the nodes.

In this manner there is completed the procedure after the determination of the parent-child relationship to the ID setting for all the nodes as shown in Fig. 18.

In the following there will be explained, as an example, the operations in an actual network shown in Fig. 9. Fig. 9 shows a hierarchic structure in which nodes A and C are directly connected under a root node B, while a node D is directly connected under the node C, and nodes E, F are connected under the node D.

In the following there will be given an explanation on such hierarchic structure and the procedure of determining the root node and the node ID's.

After bus resetting, there is executed the  
5 declaration of the parent-child relationship between the directly connected ports of the nodes, in order to recognize the connection status of the nodes. In the parent-child relationship, the parent side assumes a higher position and the child side assumes a lower  
10 position in the hierarchic structure. After the bus resetting in the configuration of Fig. 9, the parent-child declaration is at first executed by the node A.

Basically, the parent-child declaration can be  
15 started from a node having connection only at one port thereof (such node being called a leaf). Such node can identify that it has the connection at one port only and can therefore know that it constitutes an end of the network, and the parent-child relationship is  
20 determined from a fast reacting one among such leaves. Thus the port of the side declaring the parent-child relationship (namely node A in the connection A - B) is set as a child, and the port of the partner (node B) is set as a parent. Thus in the connections A - B, E - D  
25 and F - D there are respectively determined a child and a parent.

Then the procedure shifts to an upper level, and

the parent-child relationship declaration is made to a further higher level, starting from the nodes, among those having port with plural connections (such node being called a branch), having received the

5 parent-child declaration from other nodes. In the example shown in Fig. 9, the node D, after the determination of the parent-child relationship in D - E and D - F, declares the parent-child relationship to the node C, whereby the nodes D, C are respectively

10 determined as a child and a parent in the connection D - C. The node C, having received the parent-child declaration from the node D, declares the parent-child relationship to the node B connected to another port, whereby the nodes C, B are respectively determined as a

15 child and a parent in the connection C - B.

As a result the hierarchic structure shown in Fig. 9 is determined, and the node B finally becoming the parent in all the connected ports is determined as the root node. There exists only one root within a network

20 configuration.

In the configuration shown in Fig. 9 the node B is determined as the root node, but the root node may shift to another node if the node B, having received the parent-child declaration from the node A, executes

25 the parent-child declaration to another node at an earlier timing. Thus, depending on the timing of declaration, any node may become the root node, and the

00521450

root node is therefore not fixed in a given network configuration.

After the determination of the root node, there is entered the mode of determining the node ID. Each of  
5 all the nodes informs all other nodes of the determined self ID (broadcasting function). The self ID information contains the self node number, information on the connected position, number of ports, number of connected ports, information on the parent-child  
10 relationship of each port etc.

The node ID assignment can be initiated from the nodes having connection only at one port (namely leaves), and the node numbers are assigned in the order of 0, 1, 2, ... among such leaves. The node having  
15 acquired the node ID transmits the information including the node number to other nodes by broadcasting. Thus such ID number is recognized as "already assigned".

When all the leaves have acquired the self node  
20 ID's, the process shifts to the branches and the ID numbers succeeding to those assigned to the leaves are then assigned to the branch nodes. As in the case of leaf, branches having acquired the node ID number broadcast the node ID information in succession, and  
25 the root node at last broadcasts the self ID information. Consequently the root node always has the largest node ID number.

In this manner the node ID assignment is completed for the entire hierarchic structure, whereby the network configuration is reconstructed and the bus initialization is completed.

5 [Arbitration]

In the 1394 serial bus, an arbitration for the bus use right is always executed prior to the data transfer. The 1394 serial bus is a logic bus-type network in which the same signal is transmitted to all  
10 the devices in the network by the relaying function of each connected device, so that the arbitration is indispensable for avoiding packet collision. Through such arbitration, only one node can execute data transfer at a given time.

15 The arbitration procedure will be explained with reference to Fig. 10A showing the operation of requesting the bus use right and Fig. 10B showing the operation of permitting the bus use right. The bus arbitration will be explained in more details with  
20 reference to Figs. 10A and 10B.

When the arbitration is initiated, a node or each of plural nodes issues a request for the bus use right to the parent node. In Fig. 10A, the nodes C and F issue the requests. In response, the parent node (node  
25 A in Figs. 10A and 10B) issues (or relays) the request for the bus use right to a parent node. The request is finally delivered to the arbitrating root.



Receiving the request for the bus use right, the root node determines the node by which the bus is to be used. The arbitrating operation is executed only by the root node, and the permission to use the bus is given to the winning node in the arbitration. Fig. 10B shows an example in which the permission is given to the node C while the use by the node F is refused. A DP (data prefix) packet is transmitted to the losing node, indicating the refusal of the request.

10 The request for the bus use right from the refused node has to wait until the next arbitration.

The node having won the arbitration and acquired the permission for using the bus can thereafter start the data transfer.

15 The flow of the arbitration will be explained with reference to a flow chart shown in Fig. 19.

In order that the node can initiate the data transfer, the bus has to be in the idle state. In order to recognize that the bus is currently empty after the completion of the preceding data transfer, there is judged the lapse of a predetermined idle time gap length (for example subaction gap) set for each transfer mode, and each node judges that it can start its data transfer after the lapse of such time gap.

25 More specifically, a step S401 discriminates whether a predetermined gap length is obtained corresponding to the data to be transferred such as the

55500T 0052T460

async data or iso data. The sequence waits until the predetermined gap length is obtained, since the bus use right required for starting the data transfer cannot be requested unless such gap length is obtained.

- 5 The predetermined gap length is obtained in the step S401, a step S402 discriminates whether data to be transferred are present.

10 If such data are present, a step S403 issues a request for the bus use right for securing the bus to the root for the data transfer. The signal representing the request for the bus use right is transmitted through the nodes in the network as shown in Fig. 10A and eventually delivered to the root. If the step S402 identifies absence of data, the  
15 sequence remains in the waiting state.

Then, if the root receives in a step S404 at least a request for the bus use right issued in the step S403, the root checks in a step S405 the number of the nodes having issued the request. If the step S405  
20 identifies that the node number issuing the request = 1, the permission to use the bus is to be given to such node immediately thereafter.

If the step S405 identifies that the requests are issued from plural nodes, the root executes in a step  
25 S406 an arbitration for selecting one node for giving the permission. This arbitration is conducted in such fair manner that the permissions are not given to a

particular node but uniformly given to all the nodes. Then, in a step S407, the root classifies, among the plural nodes having issued the request, a winning node that has acquired the permission by the arbitration and other losing nodes.

In a step S408, the root sends a permission signal to the single node that has acquired the permission as the result of the arbitration in the step S406 or without the arbitration in case the node number = 1 in the step S405, and the node having received the permission signal immediately initiates the transfer of the data (packet) to be transferred.

The root also sends, in a step S409, the  
aforementioned DP packet indicating the loss in the  
15 arbitration to the node with which has failed to  
acquire the permission in the arbitration in the step  
S406. The node which has received the DP packet  
returns to the step S401 in order to issue again the  
request for the bus use right for data transfer, and  
20 waits until the predetermined gap length is obtained.  
[Asynchronous (non-sync) Transfer]

The asynchronous transfer is a non-synchronized transfer. Fig. 11 shows phases in time of the asynchronous transfer, in which the initial subtraction gap indicates the idle state of the bus. When this idle time reaches a predetermined value, the node wishing the data transfer judges that the bus is

available and enters the arbitration process for acquiring the bus use right.

When the bus use right is acquired in the arbitration, the data transfer is executed in a packet transfer format. After the data transfer, the receiving node completes the transfer by returning an acknowledgement code "ack" indicating the result of reception or sending a response packet, after a short gap called "ack gap". The "ack" code consists of 4-bit information and 4 check sum bits, including information indicating whether the transfer is successful or pending or the like is busy, and is immediately returned to the transmitting node.

Fig. 12 shows an example of the packet format for the asynchronous transfer. The packet consists of a data portion, CRC data for error correction and a header, which contains, as shown in Fig. 12, a destination node ID, a source node ID, a transfer data length and various codes.

The asynchronous transfer is a 1-to-1 communication from the source node to the destination node. The packet transferred from the source node is delivered to all the nodes in the network, but is disregarded in the nodes different in address and is read by the only one node of the address.

[Isochronous (sync) Transfer]

The isochronous transfer is a synchronized

transfer. The isochronous transfer, constituting the most important feature of the 1394 serial bus, is particularly suitable for transfer of the data requiring real-time transfer, for example multi-media data such as video image data or audio data. In contrast to the asynchronous transfer in the 1-to-1 form, the isochronous transfer is conducted from the transferring source node to all other nodes uniformly by the broadcasting function.

Fig. 13 shows phases in time of the isochronous transfer. The isochronous transfer is executed on the bus at a constant interval, which is called the isochronous cycle and is selected as 125  $\mu$ s. A cycle start packet indicates the start time of the isochronous cycle, thus adjusting the time in each node.

The cycle start packet is transmitted by a node called cycle master, which transmits the cycle start packet indicating the start of a cycle, after the lapse of a predetermined idle time (subaction gap) following the end of transfer in the immediately preceding cycle. Thus the cycle start packets are transmitted with an interval of 125  $\mu$ s.

As indicated by channels A, B and C in Fig. 13, the packets of plural kinds within a cycle are respectively given channel ID's and can be distinguished in the transfer. Consequently the

real-time simultaneous transfers among plural nodes are made possible, and the receiving node fetches the data of a desired channel ID only. The channel ID does not indicate the address of the destination but merely

5 gives a logic number to the transferred data. Consequently any packet is transmitted by broadcasting from a source node to all other nodes.

Prior to the isochronous packet transfer, there is executed an arbitration for the bus use right as in the  
10 case of asynchronous transfer. However, in the isochronous transfer, which is not the 1-to-1 transfer, there is no acknowledgement code.

The isochronous gap (iso gap) shown in Fig. 13 indicates an idle time required for confirming the  
15 availability of the bus, prior to the start of the isochronous transfer. When this idle time lapses, the node wishing the isochronous transfer judges that the bus is available and can enter the arbitration prior to the data transfer.

20 Fig. 14 shows an example of the packet format for the isochronous transfer, to be explained in the following.

The packet divided in each channel consists of a data portion, CRC data for error correction and a  
25 header, which contains, as shown in Fig. 14, a transfer data length, a channel number, various codes and error correcting CRC data.

[Bus Cycle]

On the actual 1394 serial bus, the asynchronous transfer and the isochronous transfer can be present in mixed manner. Fig. 15 shows phases in time of the transfer state on the bus wherein the asynchronous transfer and the isochronous transfer are present in mixed manner.

The isochronous transfer has the higher priority of execution than the asynchronous transfer, because, after the cycle start packet, the isochronous transfer can be activated with a shorter gap length (isochronous gap) of the idle period than the gap length (subaction gap) required for activating the asynchronous transfer. Therefore the isochronous transfer is executed preferentially to the asynchronous transfer.

In a general bus cycle shown in Fig. 15, the cycle start packet is transferred from the cycle master to other nodes at the start of a cycle #m. In response each node executes time adjustment, then the node wishing the isochronous transfer enters arbitration after waiting for the predetermined idle period (isochronous gap) and then transfers the packet. In Fig. 15, the isochronous transfer is executed in succession in the channels e, s and k.

The sequence from the arbitration to the packet transfer is repeated for the number of assigned channels to complete the isochronous transfer in the

00412300.10053  
005001"00521450

cycle #m, and the asynchronous transfer is then enabled. More specifically, when the idle time reaches the subaction gap required for the asynchronous transfer, the node wishing the asynchronous transfer  
5 judges that it can enter the arbitration. However, the asynchronous transfer is enabled only if the subaction gap required for activating the asynchronous transfer can be realized within the period from the end of the isochronous transfer to the time (cycle synch) for  
10 transferring the next cycle start packet.

The cycle #m shown in Fig. 15 executes, after isochronous transfer of 3 channels, asynchronous transfer of 2 packets (packets 1 and 2) including the acknowledgements. The cycle #m ends after the  
15 asynchronous packet 2 because there is reached the time (cycle synch) for starting the cycle #m + 1 before the subaction gap is reached.

However, if the time (cycle synch) for transmitting the next cycle start packet is reached in  
20 the course of an isochronous or asynchronous transfer, such transfer is not interrupted but the cycle start packet of the next cycle is transmitted in the idle time after the end of such transfer. Thus, if a cycle continues in excess of 125  $\mu$ s, the next cycle is made  
25 correspondingly shorter than 125  $\mu$ s. In this manner the isochronous cycle can be made longer or shorter, taking 125  $\mu$ s as the standard.

00412900-10053  
005001-0052160



The isochronous transfer is always executed in every cycle in order to maintain the real-time transfer, while the asynchronous transfer may be delayed to the next or subsequent cycle in case the cycle time is shortened. The cycle time, including information on such delay, is managed by the cycle master.

In the foregoing, there has been summarized the functions of IEEE 1394 serial bus.

In the following there will be briefly explained the enciphering method in the present embodiment.

In enciphering the general communication information, there are principally employed the common key enciphering method and the open key enciphering method. At first there will be explained the common key enciphering method.

#### [Common Key Enciphering Method]

Among the enciphering algorithms, the common key enciphering method employs a common key in the enciphering and deciphering. The common key enciphering method can be generally divided into the stream cipher and the block cipher.

#### (1) Stream Cipher

The stream cipher method executes enciphering, for example in enciphering a plain text consisting of bits "0" and "1", by adding a 1-bit key "1" or "0" generated by random numbers, to each bit of the plain text by

5

## 15

20

25

uniformly randomize the enciphered information because the replacement or rearrangement of the bits is simply repeated. There also results a drawback of a longer transfer time because the replacement or rearrangement has to be repeated many times in order to approach to the uniform randomization.

[Open Key Cipher Method]

Among the cipher algorithms, a method employing different keys in the enciphering and in the deciphering is called the open key cipher method. In this method, the enciphering key is disclosed to the partner of information communication, and the key for deciphering the information enciphered with such enciphering key is held in secrecy. The disclosed key is called the open key, while the key held in secrecy is called the secret key. It is not possible to estimate the secret key from the open key, but these two keys are formed in pair, and the cipher information formed by the open key can be deciphered only with the secret key.

This method has an advantage of higher security of the key (the secret key alone has to be held in secrecy by the receiving side), but is also associated with a disadvantage of requiring a process time longer, by about 1,000 times, than in the common key cipher method. For this reason, there are being employed methods utilizing both the common key cipher and the

SECRET 00527460

open key cipher. An example of such methods will be explained in the following.

5 The transmitting side at first requests the transmission of an open key to the receiving side, and transmits, to the receiving side, a common key enciphered with the open key cipher from the receiving side, whereby the common key cipher is shared between the transmitting side and the receiving side. The process time can be made relatively short, by then transmitting the information enciphered with such common key cipher.

In the present embodiment, one of the methods described above is employed for enciphering.

15 Figs. 1A and 1B are schematic views of the configuration of a mobile communication terminal of an embodiment of the present invention, respectively showing a PDA (personal digital assistant) of the transmitting side and a PDA of the receiving side.

20 As shown in Fig. 1A, the PDA 1 of the transmitting side is composed of an information process unit 3 for executing various processes in the terminal, a cipher process selection unit 4, an enciphered signal process unit 5, and an information transmission/reception unit 6. The cipher process selection unit 4 discriminates  
25 whether the transmitting PDA 1 and the receiving PDA 2 are directly connected for example by the 1394 serial bus, whether the receiving PDA 2 is equipped with a

09412900 100539  
005001 00521460

cipher process unit and whether the enciphering request is sent from the transmitting side, and selects whether or not to execute the enciphering according to the result of such discriminations. Also the enciphered  
5 signal process unit 5 executes enciphering of the signal and conversions of the enciphered signal into the original signal.

Also as shown in Fig. 1B, the PDA 2 of the receiving side is composed of an information process  
10 unit 7 and an information transmission/reception unit 9 which are similar to the information process unit 3 and the information transmission/reception unit 6 in the transmitting PDA 1, a reception error process unit 8 for informing the transmitting side and the receiving  
15 side of a reception error in case of reception of the enciphered information signal, and a reception error display unit 10. In the present embodiment, the PDA 2 of the receiving side is not equipped with a unit corresponding to enciphered signal process unit 5 in  
20 the transmitting side, and is therefore incapable of decoding and utilizing the enciphered signal in case such enciphered signal is received.

In the following there will be explained the communicating operations in the PDA's of the above-  
25 described configuration. At first an information signal d1, generated by the information process unit 3 of the transmitting PDA 1, is supplied to the

09442500 1.00593

enciphered signal process unit 5. In case a request  
signal d3 for enciphering is issued, the cipher process  
selection unit 4 converts thus generated information  
signal d1 into an enciphered signal d2, which is then  
5 supplied to the information transmission/reception unit  
6 whereupon the transmission is initiated. On the  
other hand, in the absence of the enciphering request  
signal d3, the information signal d1 is directly  
supplied to the information transmission/reception unit  
10 6 and is transmitted.

The receiving PDA 2 receives the information  
signal d1 or the enciphered signal d2 by the  
information transmission/reception unit 9, and the  
received signal is supplied to the reception error  
15 process unit 8 in order to discriminate whether the  
received signal is enciphered or not. In case the  
reception error process unit 8 identifies that the  
received signal is the enciphered signal d2, this fact  
is informed to the receiving person by the reception  
20 error display unit 10, and a reception error message d4  
is also transmitted to the source of transmission. On  
the other hand, in case the reception of the non-  
ciphered information signal d1 is identified, the  
information signal d1 is supplied to the information  
25 process unit 7 and is utilized.

Flow charts shown in Figs. 2A and 2B show the  
operation sequence of the PDA of the present

00521460 00412900 100519

embodiment, respectively in the transmitting side and the receiving side.

Referring to Fig. 2A, if an information communication request is made in a step S1 from the transmitting side, a step S2 discriminates, by the  
5 cipher process selection unit 4, whether a cipher process is requested by the transmitting person.

The cipher process request mentioned above is made, for example, in case:

- 10           1) a high level of secrecy is set for the information in advance by the transmitting person;
- 2) information is transmitted to a receiving person set in advance by the transmitting person; and
- 3) a request for enciphering is set in advance by  
15 the transmitting person:
- and a cipher request signal d5 is generated. In the presence of the cipher request signal d5, the cipher process selection unit 4 generates a cipher request signal d3 to the cipher signal process unit 5, which in  
20 response executes enciphering of the information in a step S5.

On the other hands, in case the step S2 identifies absence of the cipher request signal d5, the sequence proceeds to a step S3 for discriminating whether the  
25 transmitting PDA 1 and the receiving PDA 2 are directly connected to a registered server (not shown). The discrimination is made by the cipher process selection

unit 4, based on a connection status signal d8 of the PDA, transmitted from the unrepresented server, as shown in Figs. 1A and 1B.

In case both PDA's are directly connected to the server, the cipher process selection unit 4 issues the cipher request signal d3 to the enciphered signal process unit 5, which, in response, executes the enciphering of the information in the step S5. On the other hand, at least either of the PDA's is not directly connected to the server, the sequence proceeds to a step S4 to discriminate whether the receiving PDA 2 permits enciphering.

The discrimination in the step S4 may be made, for example, by registering the information of the receiving PDA 2, including whether the enciphering is permitted or not, in the server and by referring to such information. It may also be made, as shown in Figs. 1A and 1B, by transmitting a discrimination request signal d6 from the cipher process selection unit 4 of the transmitting side to the information process unit 7 of the receiving side, discriminating whether the enciphering is permitted or not by the information process unit 7 of the receiving side, and returning a discrimination signal d7 indicating whether the enciphering is permitted or not (not permitted in the example shown in Figs. 1A and 1B) from the information process unit 7 of the receiving side to the



cipher process selection unit 4 of the transmitting side.

In case the result of discrimination indicates that the enciphering is not permitted, the step S5 for enciphering is skipped and the step S6 initiates the transmission of the information signal. In case the result of discrimination indicates that the enciphering is permitted, the cipher process selection unit 4 issues the cipher request signal d3 to the cipher signal process unit 5, which in response executes enciphering in the step S5. Subsequently the enciphered signal is transmitted in the step S6.

The receiving PDA 2, upon receiving the signal in a step S7, stores the received signal in an unrepresented sub memory in a step S8, and, in a step S9, causes the reception error process unit 8 to discriminate whether the received signal is enciphered. If enciphered, a step S11 causes the reception error display unit 10 to display the reception error to the receiving person, and, in a step S12, transmits a reception error message d4 to the source of transmission.

On the other hand, if the received signal is not enciphered, a step S10 stores the received signal in an unrepresented main memory, and a step S13 terminates the reception process. The information signal d1 stored in the main memory can thereafter be utilized by

00412300 100593  
005001 00521460

the information process unit 7.

Fig. 3 is a flow chart showing the process in case the PDA apparatus 2 of the receiving side has a configuration same as that of the PDA apparatus 1 of the transmitting side shown in Fig. 1A.

At first, when the signal is received in a step S17, a step S18 stores the received signal in the unrepresented sub memory and a step S18 discriminates whether the received signal is enciphered.

If the received signal is enciphered, the sequence proceeds to a step S20 to decipher the cipher by the ciphered signal process unit 5. Then a step S21 stores the deciphered signal in the unrepresented main memory, and a step S22 terminates the reception process. On the other hand, if the received signal is not enciphered, the step S21 stores the received signal in the unrepresented main memory and the step S22 terminates the reception process.

In the present embodiment, as explained in the foregoing, the information transmitting side is provided with the cipher signal selection unit 4 for selecting whether or not to use the enciphering of the information, thereby omitting the enciphering process as far as possible and alleviating the burden of signal processing and process relating to the enciphering. Also in case the information receiving side is not provided with the cipher function, even if the

enciphered signal is transmitted to the receiving side,  
the receiving side handles such communication as a  
reception error and gives an error message to the  
transmitting person and to the receiving person,  
5 whereby the failure in the communication can be found  
promptly and coped with adequately.

In such configuration, the cipher process  
selection unit 4 for example discriminates the level of  
secrecy of the information to be transmitted and  
10 determines whether or not to use the enciphering  
process according to the level of secrecy. For  
example, a single information communication terminal  
may be utilized both for the home and for the business  
use. In such situation, there can be considered a mode  
15 of not using the enciphering process in the  
communication with the family and using the enciphering  
process, thereby maintaining secrecy, in the  
communication for the business. In such case, there  
can be conceived a mode of use in which the information  
20 transmitting person registers in advance the addressed  
of predetermined receiving persons in the information  
communication terminal of the transmitting person, and  
the enciphering process is automatically canceled in  
the communication with such registered address but is  
25 adopted in other communications.

Also in case the information communication  
terminal is used both for the home use and for the

0942300 10033  
055001 0052160

business use, there can be conceived a requirement of reducing the communication with the family as short as possible and extending the access time for business use as long as possible. The present embodiment allows to  
5 meet this requirement by dispensing with the enciphering process in the communication for home use. It is furthermore possible to enter the level of secrecy of the information into the communication apparatus by the transmitting person in each  
10 information transmission and to cause the apparatus to discriminate the level of secrecy of such information.

Also the present embodiment determines whether or not to adopt the enciphering process by discriminating whether the information transmitting person and the  
15 information receiving person utilize a relaying equipment such as a server as the communication medium. For example the information transmission in the home, not utilizing server, has a low level of secrecy and the danger of eavesdropping is lowered by employing a  
20 cable or the like for connecting the terminals. In such case, the enciphering process can be dispensed with to alleviate the burden for the enciphering process and to achieve a higher speed in the transmission and reception of the information. On the  
25 other hand, in case of outdoor wireless communication through the server, the danger of eavesdropping is higher and the secrecy can be maintained by adopting

00442900 100533

the enciphering process.

Also in the present embodiment, there is discriminated whether the information receiving side permits enciphering (namely whether the deciphering is possible at the information receiving side), and the enciphering process is adopted or not respective if the deciphering is possible or not, whereby it is rendered possible to alleviate the burden of enciphering at the transmitting side. Also the cipher process means may be dispensed with in the information communication apparatus of the receiving side, and such simplified structure in the receiving side allows reduction in the cost and in the dimension of the apparatus.

For example, in case a child has a mobile terminal, the communication partner would mostly be a parent or a friend, and the level of secrecy of the communication between the child and the parent or the friend is not expected to be very high. Also the equipment to be used by a child is required to have a durability higher than that of the equipment to be used by an adult. Besides, such terminal is to be carried in a pocket, and there will be required a compact information communication terminal that can be accommodated in a small pocket for children.

In such case, the information communication apparatus of the present embodiment allows to achieve improvement in the durability and compactization, by

providing a simple function of executing the reception error process for the enciphered signal and omitting the more complex cipher processes. Also in transmitting information, it is rendered possible to optimize the cipher process by the information communication apparatus provided with a function of not executing the enciphering process in case the communication partner is not provided with the cipher process function.

10 More specifically, the equipment of the transmitting or receiving side may in advance locate, on the network on which the receiving side is connected, a device incorporating a decoder matching the enciphering method and having assured security and cause such device to execute the decoding process.

15 [Other Embodiments]

The present invention also includes a case where the functions of the aforementioned embodiments are realized by supplying an apparatus connected with various devices so as to drive these devices with program codes of a software realizing the functions of the aforementioned embodiment and causing a CPU or an MPU of the apparatus to drive such devices according to the stored program.

25 In such case the program codes themselves of the software realize the functions of the aforementioned embodiments, and the program codes themselves and the

0044300 100333

means for supplying the apparatus with such program codes, for example a memory medium storing the program codes, constitute the present invention. The memory medium storing such program codes can be, for example, a floppy disk, a hard disk, an optical disk, a magnetooptical disk, a CD-ROM, a magnetic tape, a non-volatile memory card, or a ROM.

The present invention also includes such program codes not only a case where the functions of the aforementioned embodiments are realized by the execution of the supplied program codes but also a case where an operating system or an application software functioning on the apparatus realize the functions of the aforementioned embodiments.

The present invention further includes a case wherein the program codes read from the memory medium are once stored in a function expansion board inserted into the computer or a function expansion unit connected to the computer, and a CPU provided in the function expansion board or the function expansion unit executes all the process or a part thereof under the control of such program codes, thereby realizing the functions of the aforementioned embodiments.

The aforementioned embodiment, as explained in the foregoing, is provided with the cipher process selection means for selecting whether or not to use the enciphering means for the transmission information at

the communication thereof, thereby omitting the enciphering process as far as possible and alleviating the burden of signal processing and process involved in enciphering.

5           The above-mentioned selection for the enciphering process can be realized by selecting whether or not to use the enciphering means according to the instruction from the information transmitting person.

10           According to another feature, the selection whether or not to use to the enciphering means is made according to the communication medium connecting the information transmitting apparatus and the information receiving apparatus. Thus, the enciphering process can be dispensed with to alleviate the burden in the  
15           enciphering process unless the information is communicated by a communication medium requiring a high level of secrecy (for example outdoor wireless communication), for example in case of information communication in a home.

20           According to still another feature, the selection whether or not to use to the enciphering means is made according to the discrimination whether the deciphering is possible in the information receiving apparatus. Thus the enciphering process is dispensed with, thereby  
25           alleviating the burden for the enciphering process in the transmitting side, in case the receiving side is incapable of deciphering. Besides, the cipher means

09442900 100543



may be dispensed with in the information receiving apparatus, whereby the compactization and cost reduction can be realized in the apparatus of the receiving side.

5           According to still another feature, the selection whether or not to use to the enciphering means is made according to the discrimination of the level of secrecy of the transmission information. It is therefore rendered possible to dispense with the enciphering  
10           process, thereby alleviating the burden associated with the enciphering process, except for the transmission of the information requiring a high level of secrecy.

          According to still another feature, there is discriminated whether the received information is  
15           enciphered, and a predetermined error process is executed in case the received information is identified as to be enciphered. Thus, in case the enciphered signal is transmitted to the receiving side which is incapable of deciphering, the receiving side processes  
20           such transmission as a reception error, whereby the erroneous communication can be promptly and properly processed.

09442900 100593

WHAT IS CLAIMED IS:

1. An information communication apparatus  
comprising:

5 enciphering means for the transmission  
information; and

cipher process selection means for selecting  
whether or not to use said enciphering means at the  
communication of information.

10 2. An information communication apparatus  
according to claim 1, wherein said cipher process  
selection means includes:

15 designation means for designating whether or not  
to execute enciphering on said transmission  
information; and

means for selecting whether or not to use said  
enciphering means according to the designation from an  
information transmitting person.

20 3. An information communication apparatus  
according to claim 1, wherein said cipher process  
selection means includes medium discrimination means  
for discriminating the communication medium connecting  
the apparatus of the information transmitting side and  
25 the apparatus of the information receiving side, and  
selects whether or not to use said enciphering means  
according to the connecting communication medium.

00442900 100530  
00500T 0052450

4. An information communication apparatus  
according to claim 1, wherein said cipher process  
selection means includes cipher permission  
discrimination means for discriminating whether the  
5 deciphering is possible at the apparatus of the  
information receiving side, and selects whether or not  
to use said enciphering means according to the result  
of said discrimination.

10 5. An information communication apparatus  
according to claim 1, wherein said cipher process  
selection means includes secrecy level discrimination  
means for discriminating the level of secrecy of said  
transmission information, and selects whether or not to  
15 use said enciphering means according to the result of  
said discrimination.

6. An information communication apparatus  
comprising:  
20 cipher discrimination means for discriminating  
whether the received information is enciphered; and  
error process means for executing a predetermined  
error process in case said cipher discrimination means  
identifies that said received information is  
25 enciphered.

7. An information communication method for

selecting whether or not to use a cipher process for the information to be transmitted, at the transmission thereof.

5           8. An information communication method according to claim 7, wherein the selection whether or not to use the cipher process for said transmission information is made according to a designation from the information transmitting person.

10           9. An information communication method according to claim 7, wherein the selection whether or not to use the cipher process for said transmission information is made according to a communication medium used among  
15 different communication media enabling communication between the apparatus of the information transmitting side and the apparatus of the information receiving side.

20           10. An information communication method according to claim 7, wherein the selection whether or not to use the cipher process for said transmission information is made according to the result of a discrimination  
whether the deciphering is possible at the apparatus of  
25 the information receiving side.

11. An information communication method according

005500T 0052TH0

to claim 7, wherein the selection whether or not to use the cipher process for said transmission information is made according to the level of secrecy of said transmission information.

12. An information communication method comprising steps of:

a) discriminating whether the received information is enciphered; and

b) executing a predetermined error process in case said received information is discriminated to be enciphered.

13. An information communication system comprising:

an information transmitting apparatus including enciphering means for the transmission information; and cipher process selection means for selecting whether or not to use said enciphering means at the communication of information; and

an information receiving apparatus including at least decoding means for decoding the non-ciphered received information; cipher discrimination means for discriminating whether the received information is enciphered; and error process means for executing a predetermined error process in case said received information is discriminated as to be enciphered.

14. An information communication system comprising;

an information transmitting apparatus including enciphering means for the transmission information; and  
5 cipher process selection means for selecting whether or not to use said enciphering means at the communication of information; and

an information receiving apparatus including cipher discrimination means for discriminating whether  
10 the received information is enciphered; and decoding means for decoding the enciphered received information, in case said received information is discriminated as being enciphered.

15 15. An information communication system according to claim 13, wherein said cipher process selection means includes designation means for designating whether or not to execute enciphering of said transmission information, and selects whether or not to  
20 use said enciphering means according to the designation from the information transmitting person.

16. An information communication system according to claim 13, wherein said cipher process selection  
25 means includes medium discrimination means for discriminating the communication medium connecting said information transmitting apparatus and said information

0412300 100593  
55500T 0062T460

receiving apparatus, and selects whether or not to use said enciphering means according to the connected communication medium.

5           17. An information communication system according to claim 13, wherein said cipher process selection means includes cipher permission discrimination means for discriminating whether the deciphering is possible in said information receiving apparatus, and selects  
10 whether or not to use said enciphering means according to the result of said discrimination.

          18. An information communication system according to claim 13, wherein said cipher process selection  
15 means includes secrecy level discrimination means for discriminating the level of secrecy of said transmission information, and selects whether or not to use said enciphering means according to the result of said discrimination.

20

          19. A computer readable memory medium storing a program for functioning a computer as means described in any of claims 1 to 6.

25

          20. A computer readable memory medium storing a program for functioning a computer as means described in any of claims 7 to 12.

0442900 100599

21. A communication apparatus comprising:

a) enciphering means for enciphering information;

b) means for discriminating whether an  
intermediate transfer device is present in a  
transmission channel; and

c) control means for causing said enciphering  
means to encipher the information in case said  
discrimination means discriminates that the  
intermediate transfer device is present.

22. A communication apparatus according to claim  
21, wherein said intermediate transfer device is a  
server.

23. A communication apparatus according to claim  
21, wherein said discrimination means is adapted to  
discriminate whether said intermediate transfer device  
is present, based on the destination address of the  
information.



ABSTRACT OF THE DISCLOSURE

It is intended, in the mobile information terminal, to achieve compactization, cost reduction and reduction in the burden of information processing, while taking the enciphering process for the information into consideration.

The cipher signal process unit for enciphering the transmission information and the cipher process selection unit for selecting whether or not to use the cipher signal process unit are provided to select whether or not to execute the enciphering of the transmission information, according to the necessity in executing the communication of information, thereby dispensing the enciphering process as far as possible and alleviating the burden of the process involved in the enciphering. Also by executing the enciphering or not respectively in case the deciphering is possible or not in the information receiving side, the cipher process means may be dispensed with in the information communication apparatus of the receiving side, whereby the apparatus of the receiving side can be made less expensive and smaller.

09412900 100599 66500T 0062T460

FIG. 1A

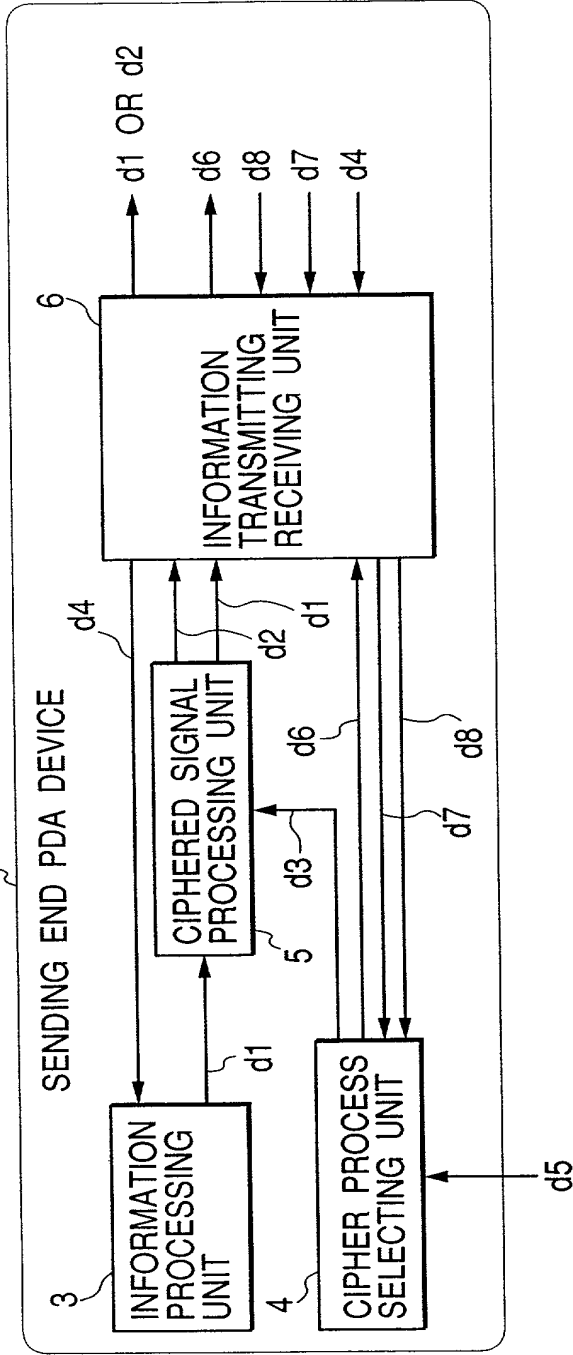


FIG. 1B

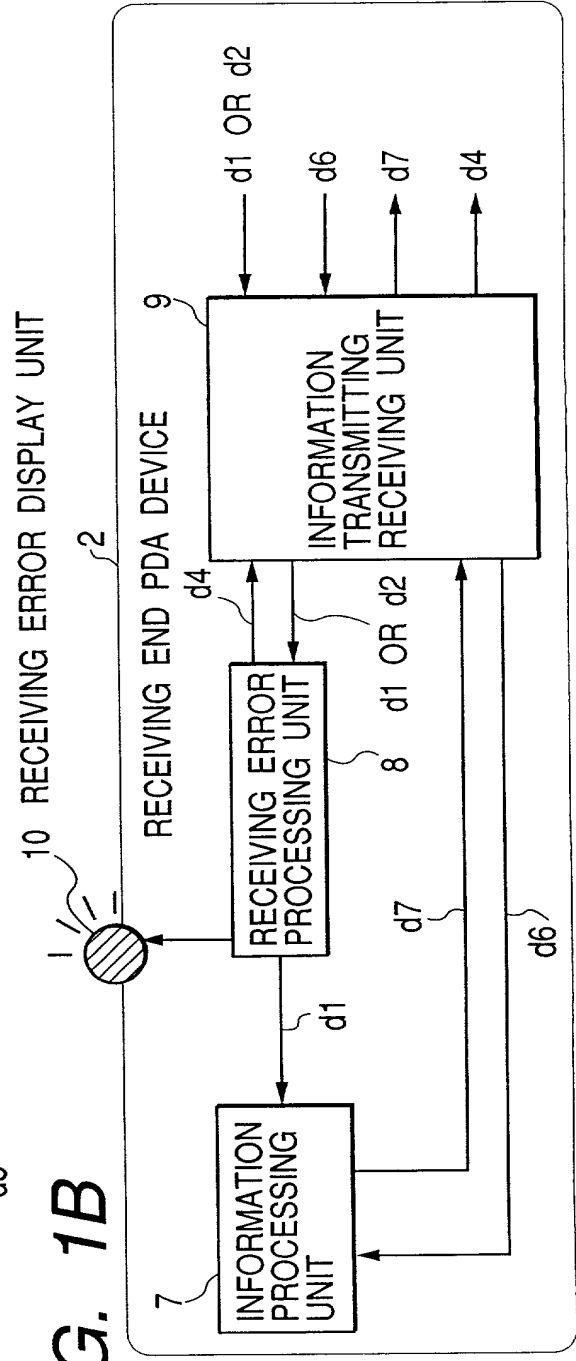


FIG. 2A




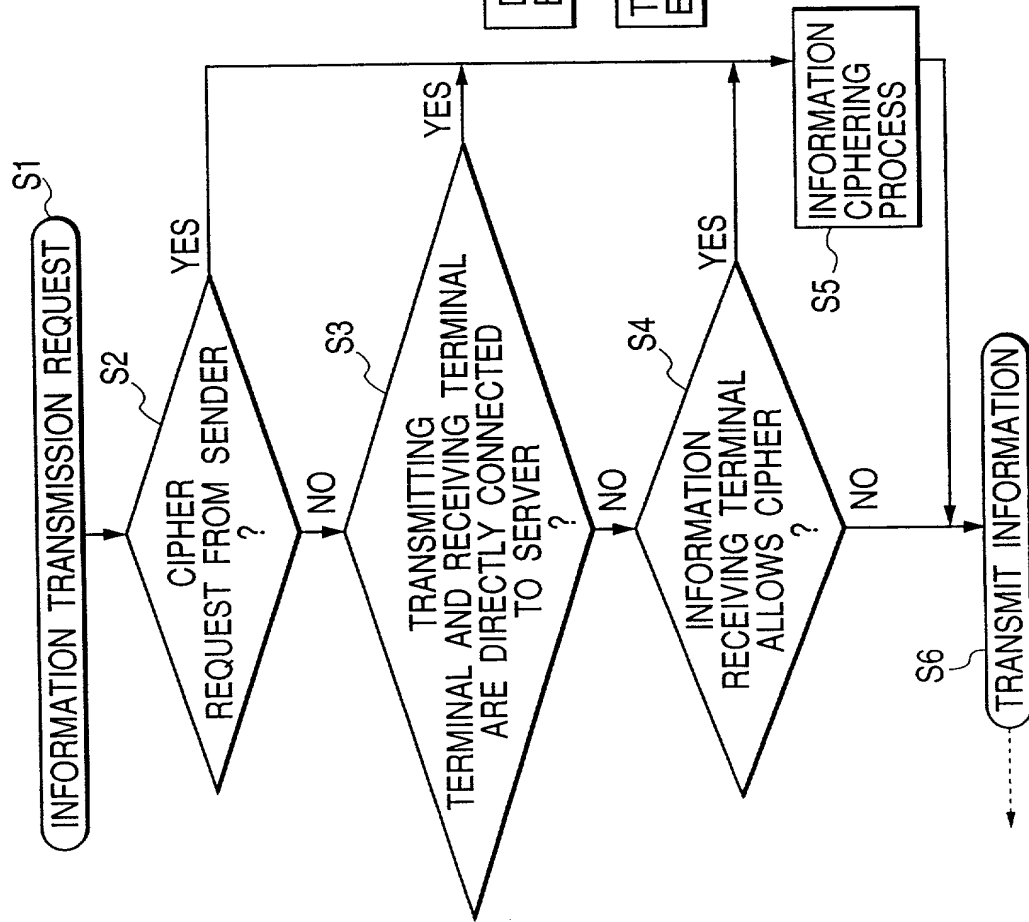


FIG. 2B

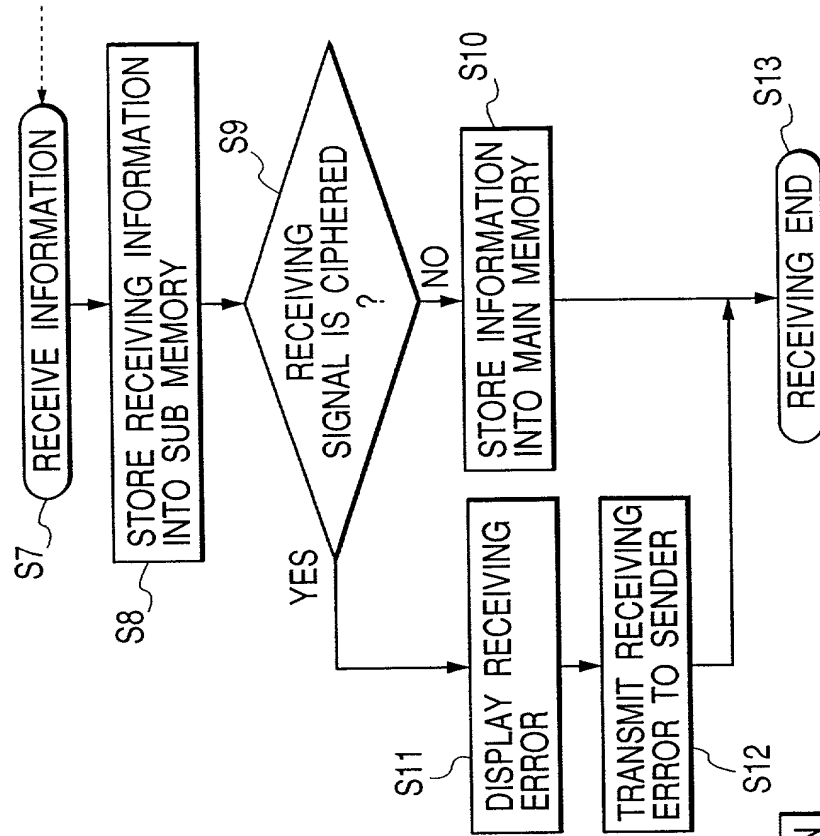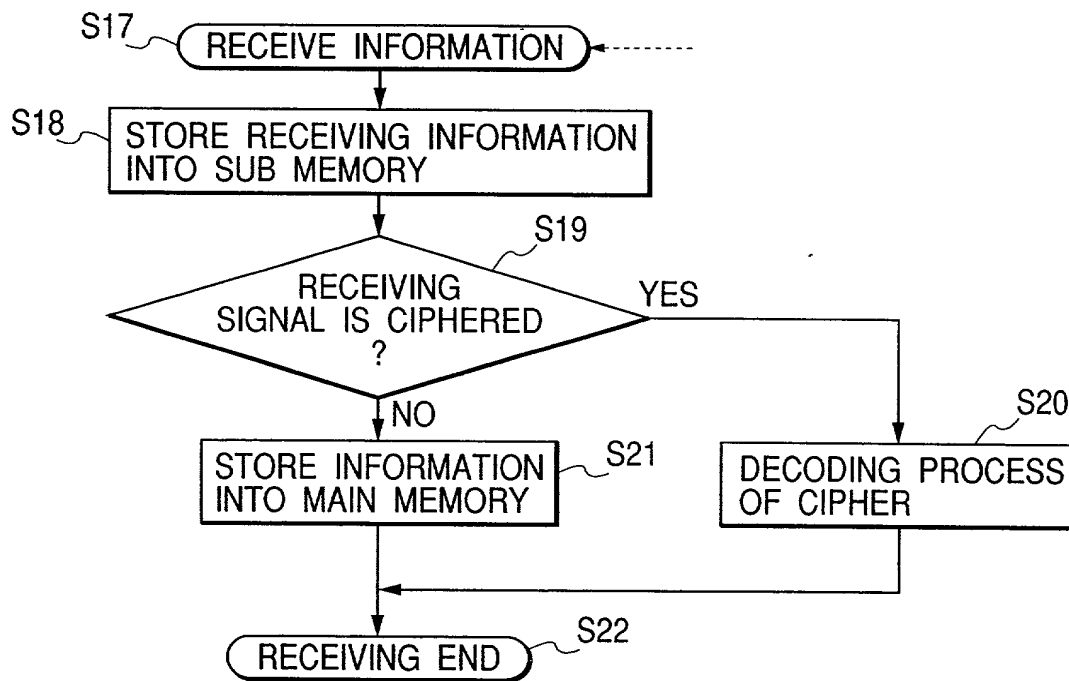

*FIG. 3*

**FIG. 4**

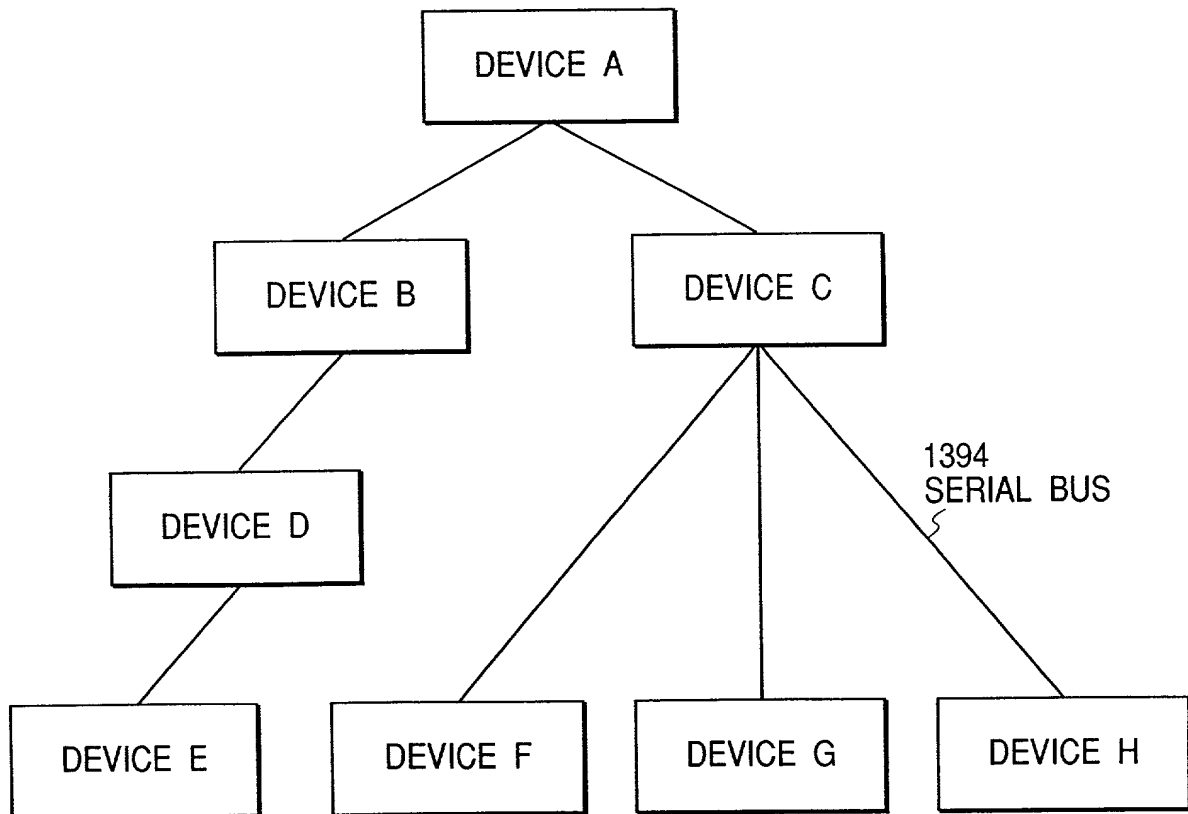


*FIG. 5*

FIG. 6






FIG. 6



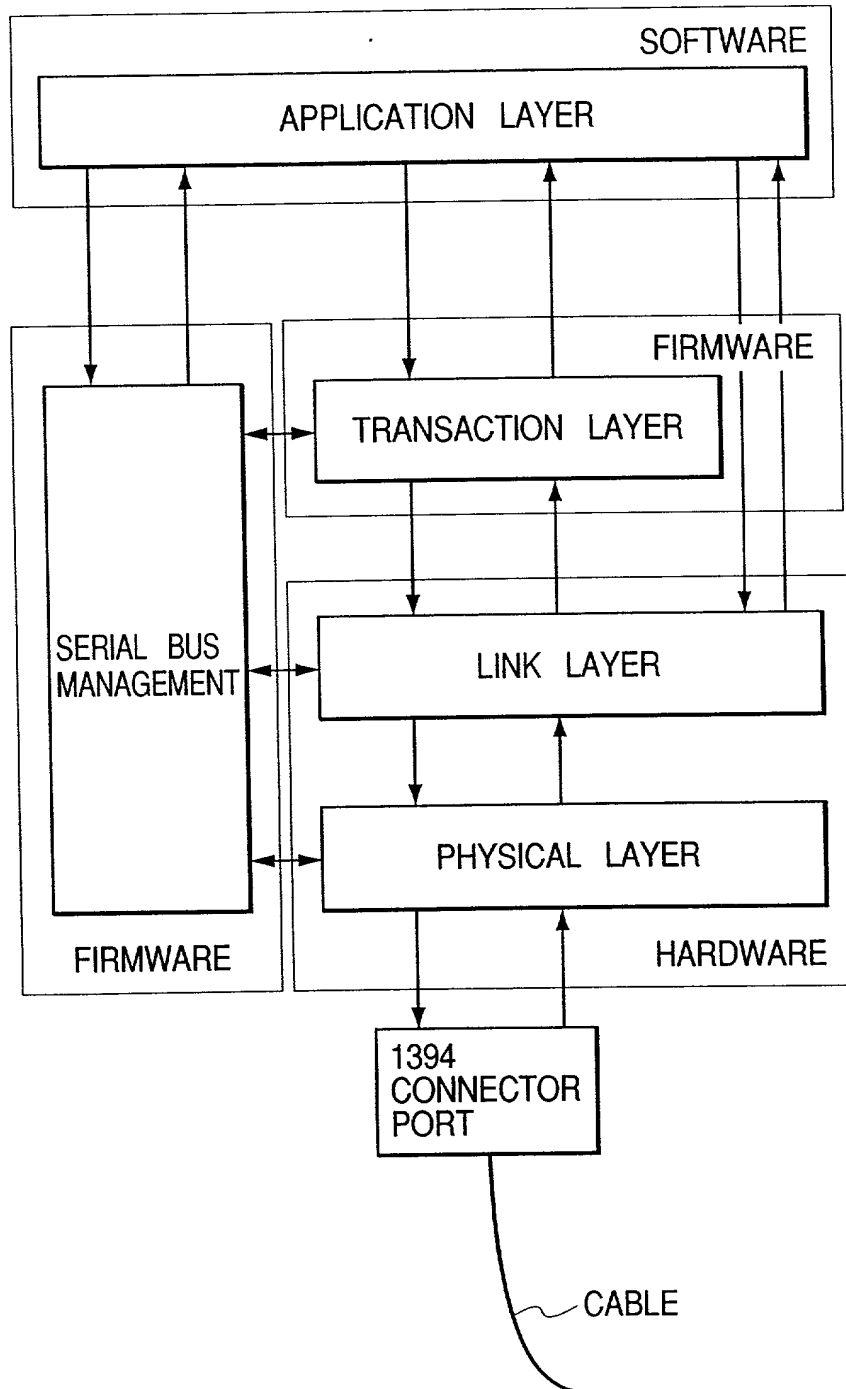

**FIG. 7**

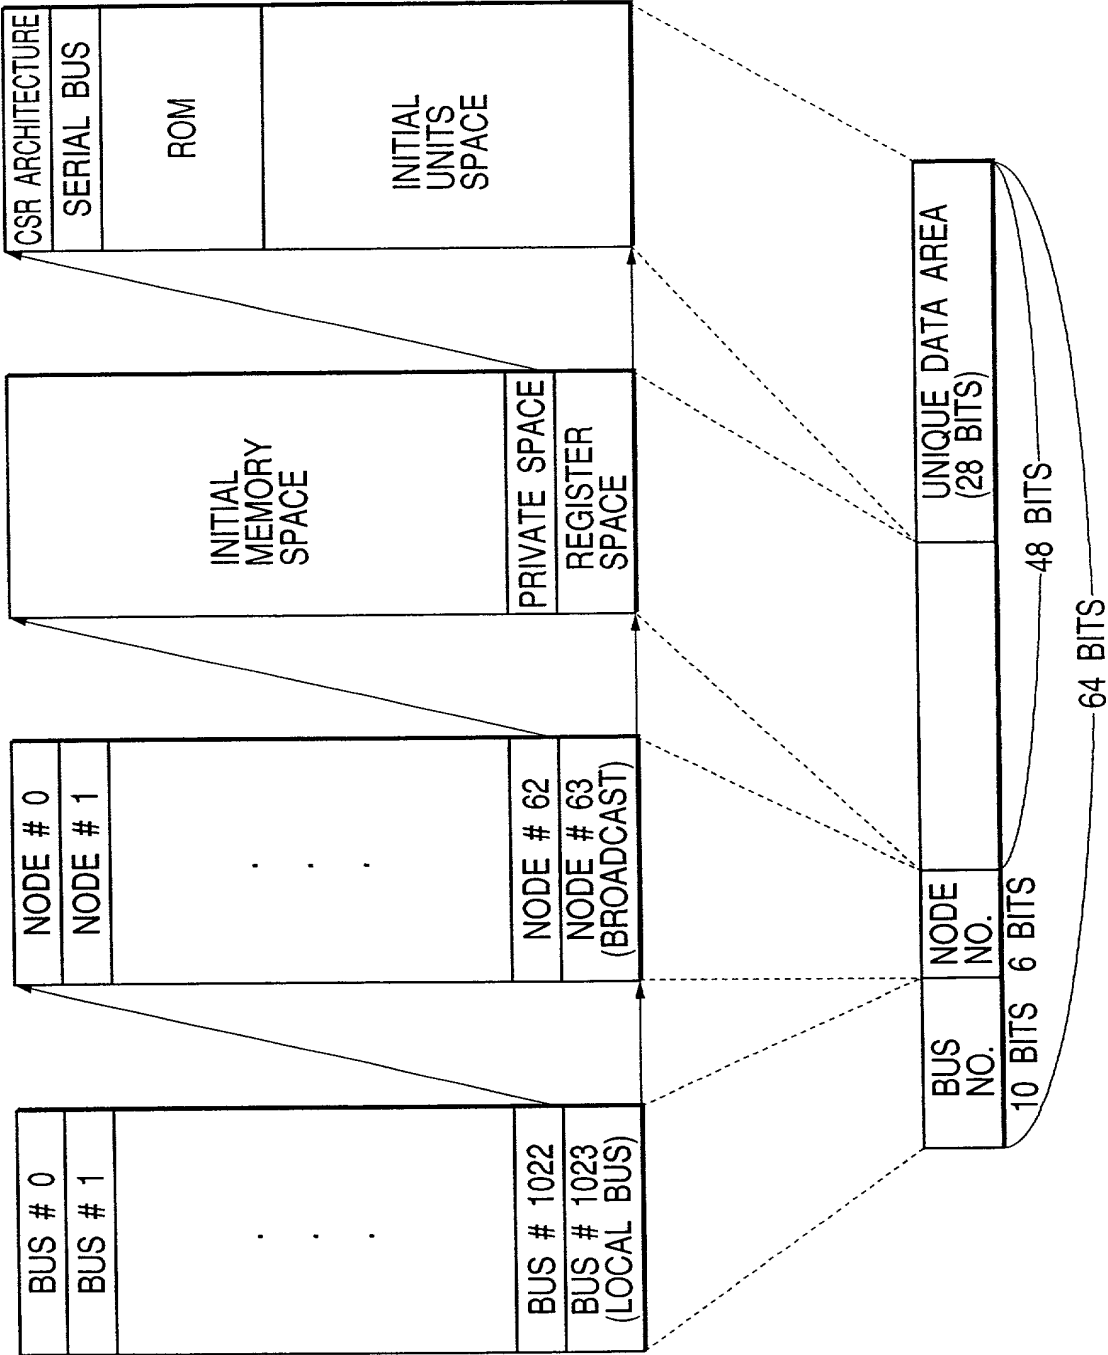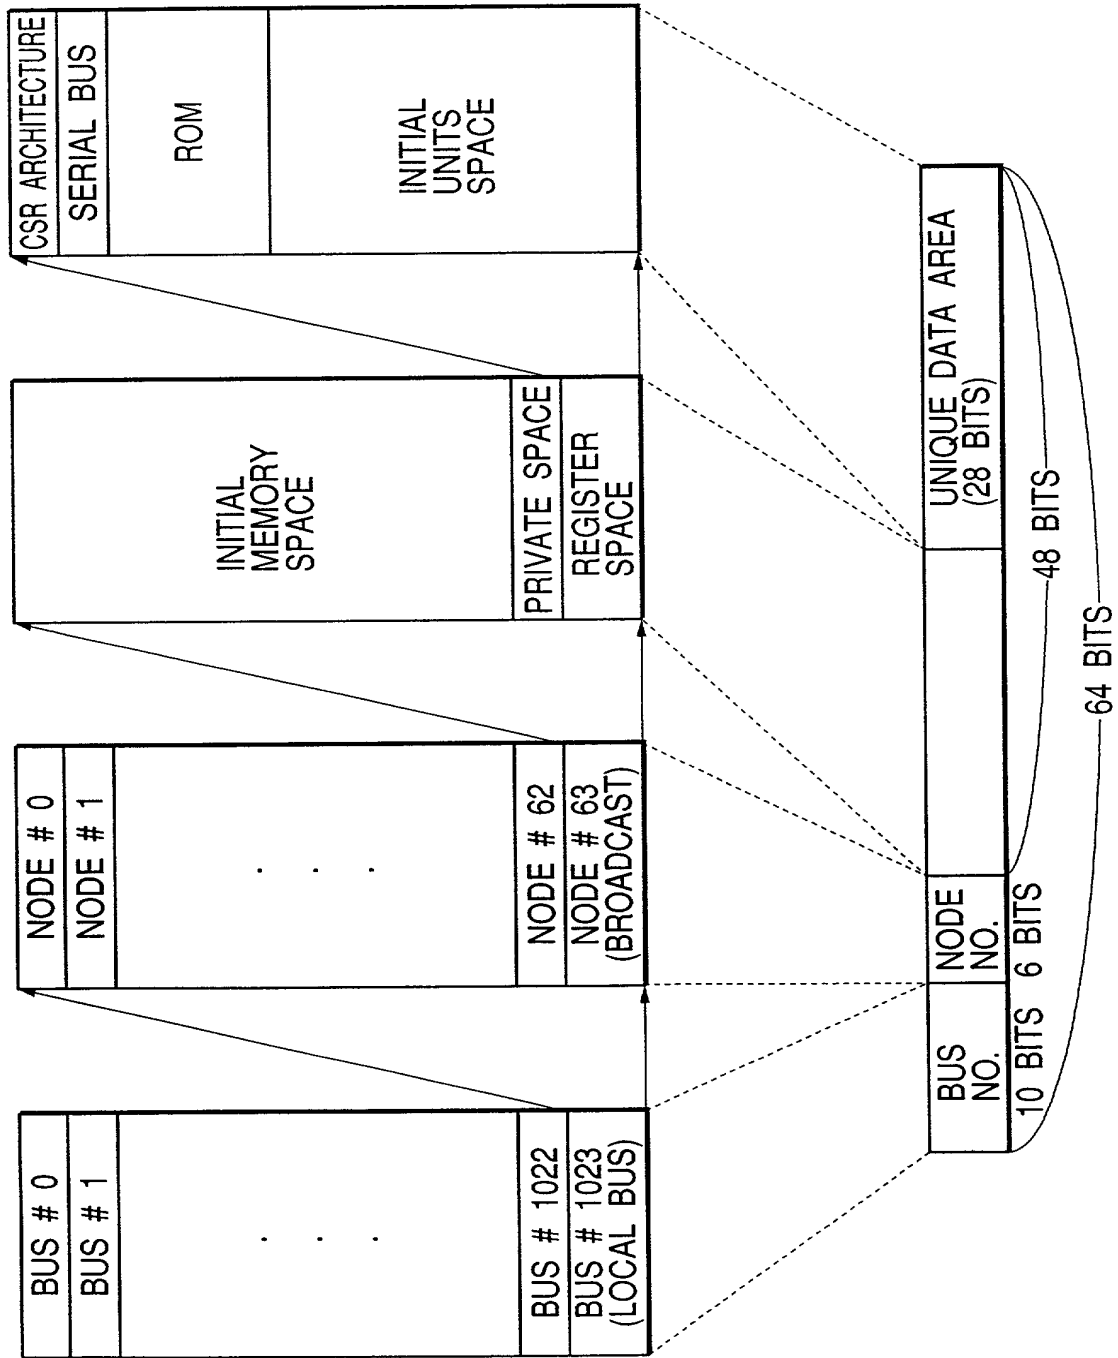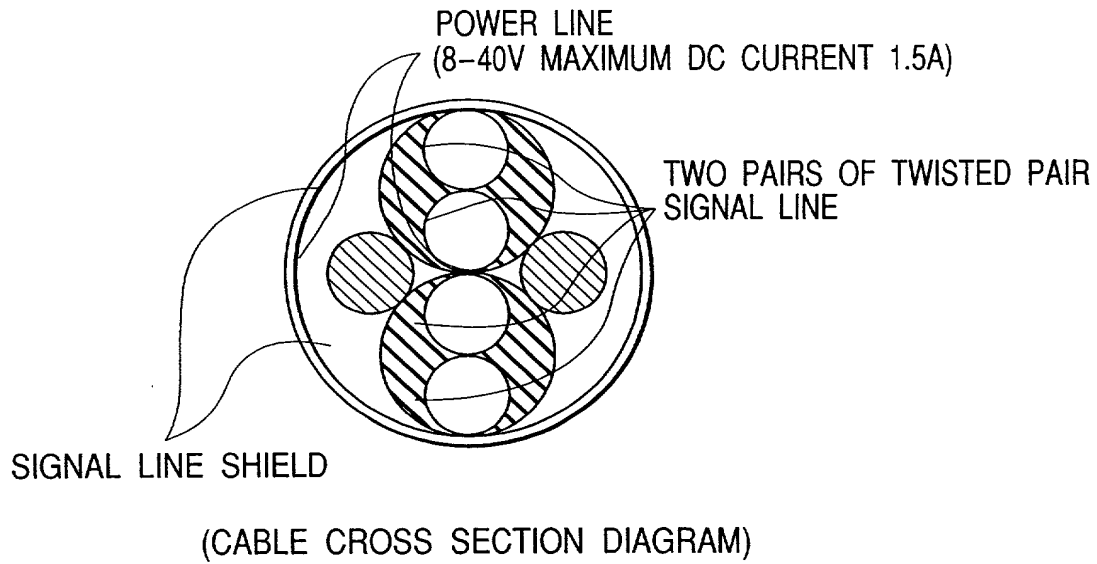

**FIG. 8**


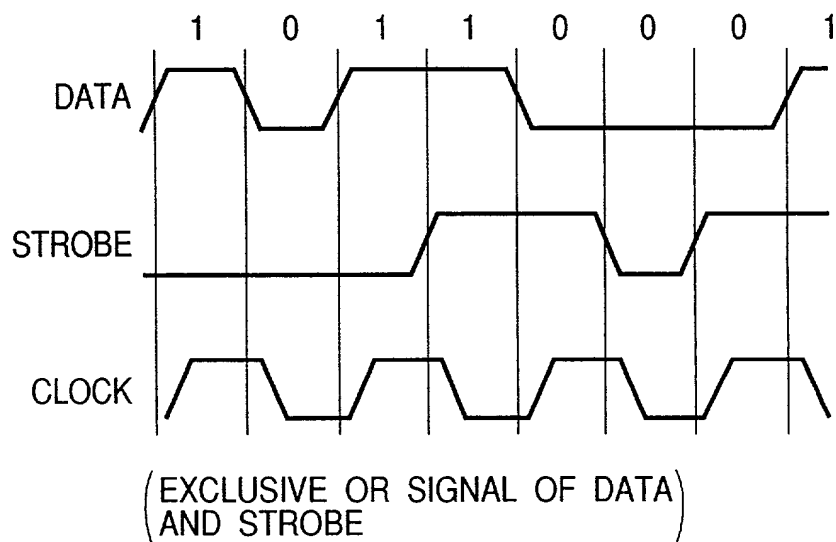


FIG. 9

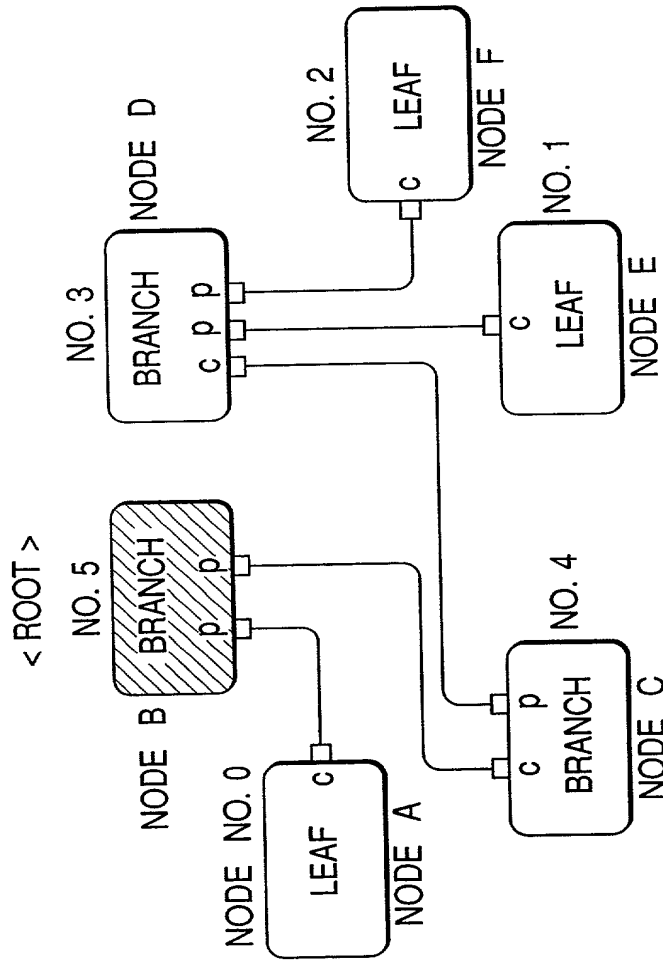

BRANCH : NODE HAVING MORE THAN TWO NODE CONNECTIONS  
LEAF : NODE HAVING ONE PORT CONNECTION

□ : PORT  
c : PORT CORRESPONDING TO CHILD NODE  
p : PORT CORRESPONDING TO PARENT NODE

FIG. 10B

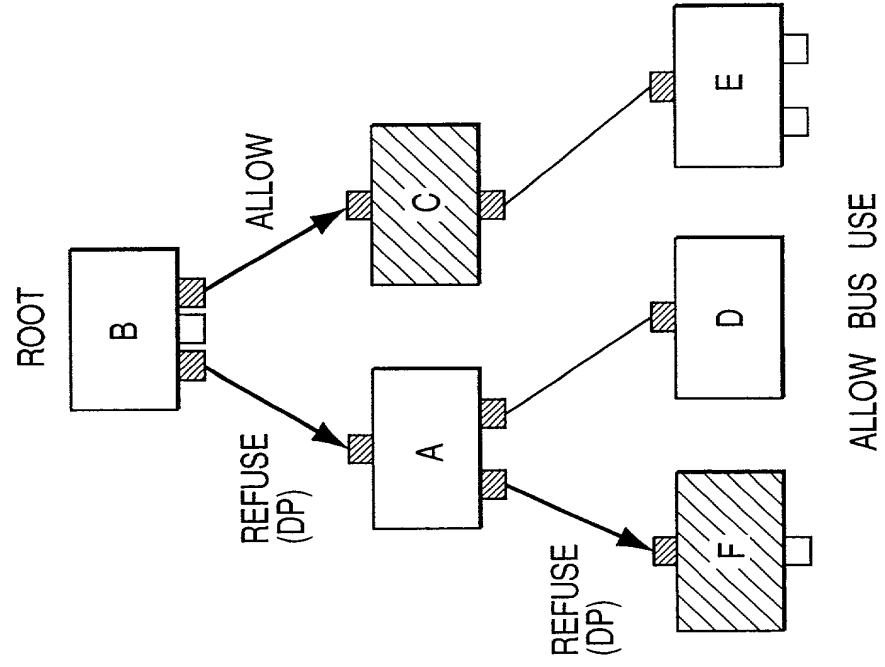


FIG. 10A

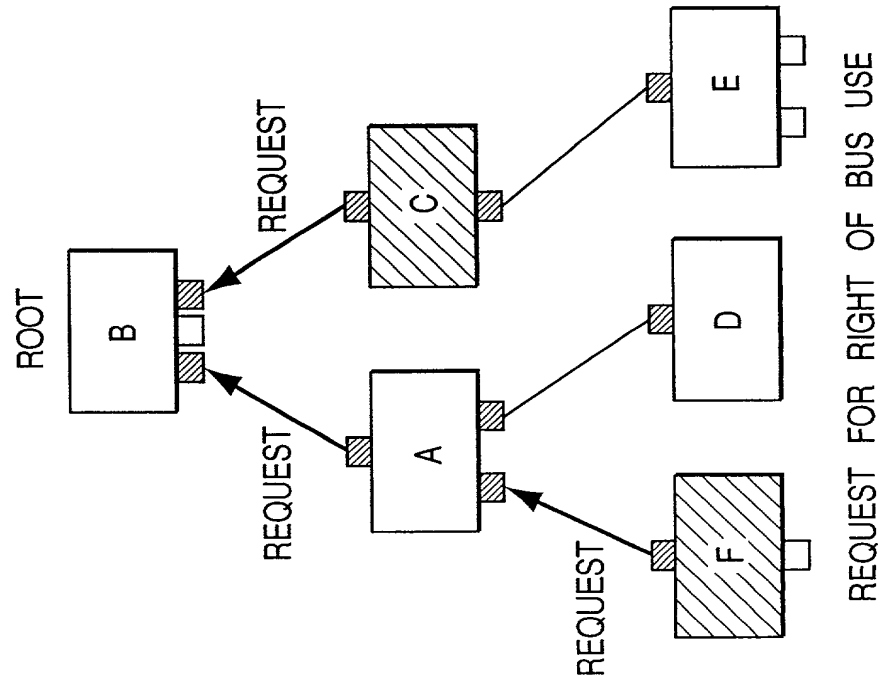


FIG. 11



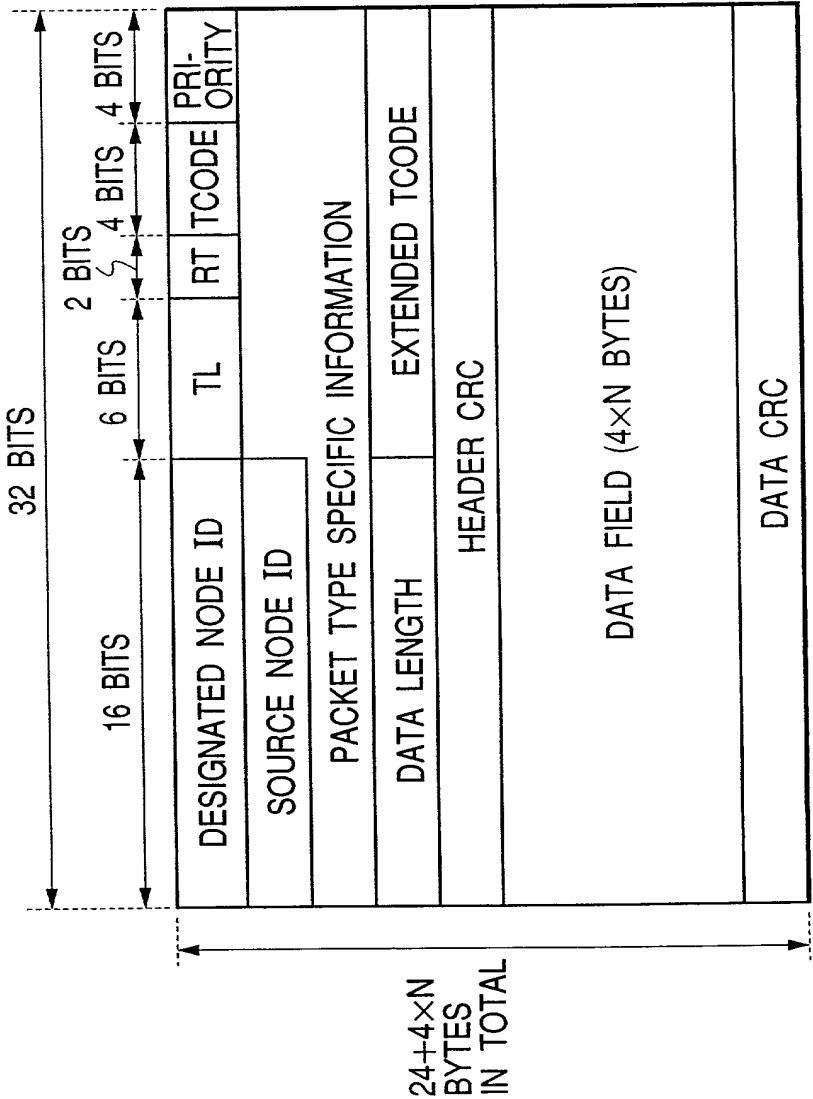


FIG. 12

**FIG. 13**

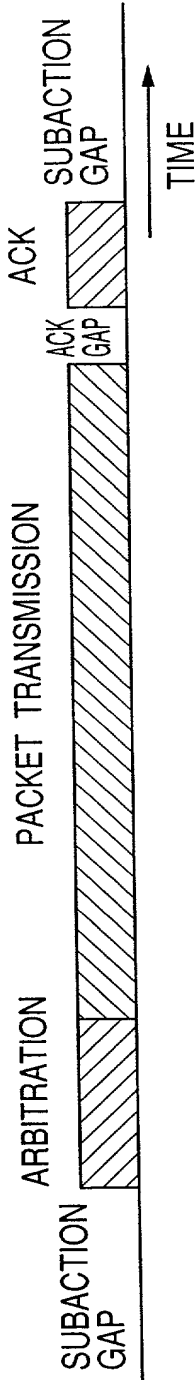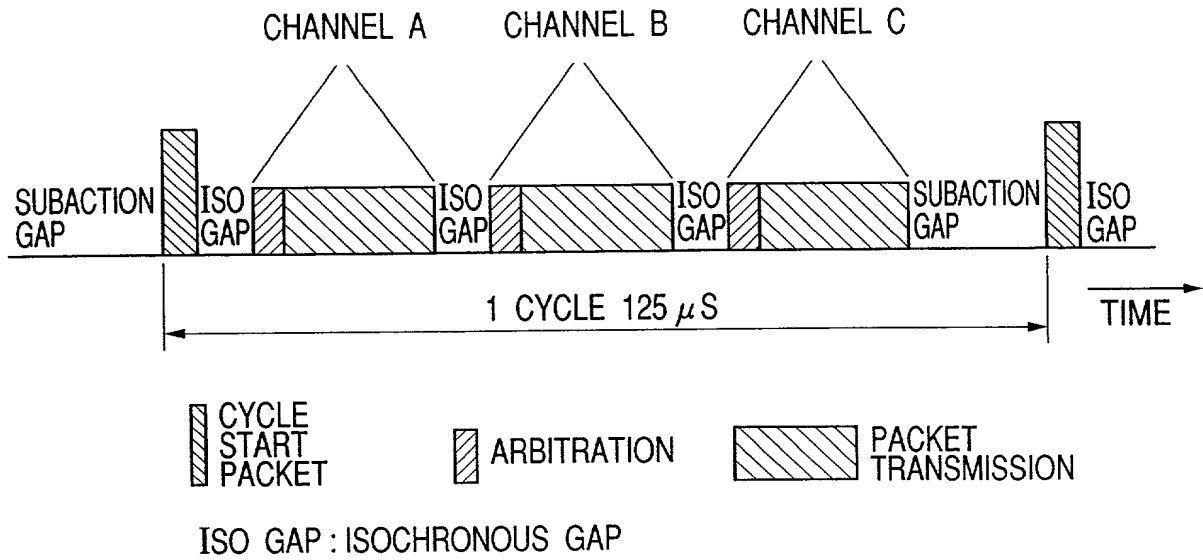

**FIG. 14**



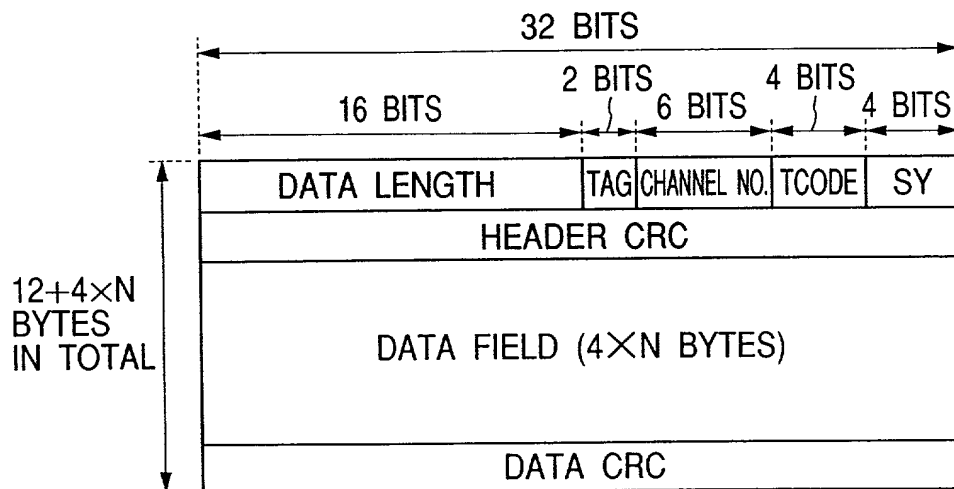


FIG. 15

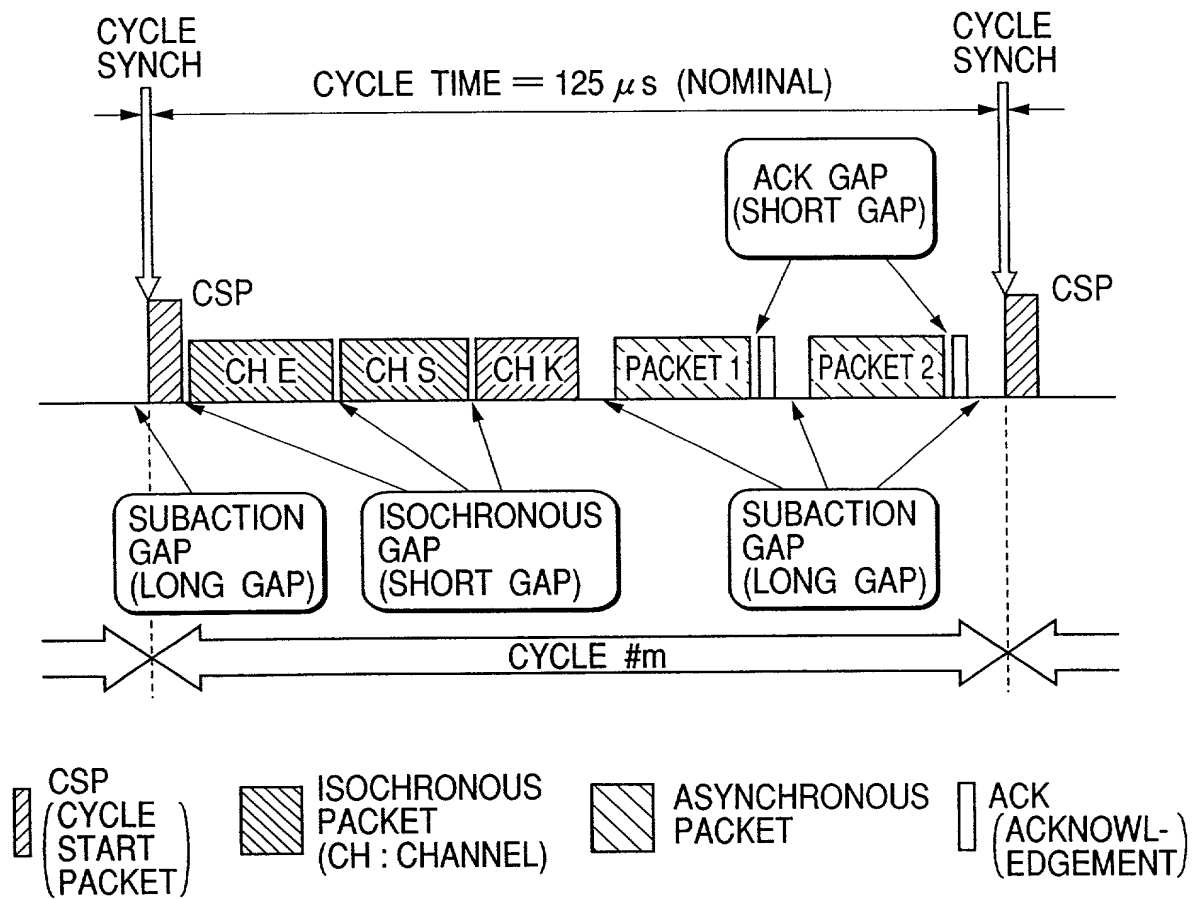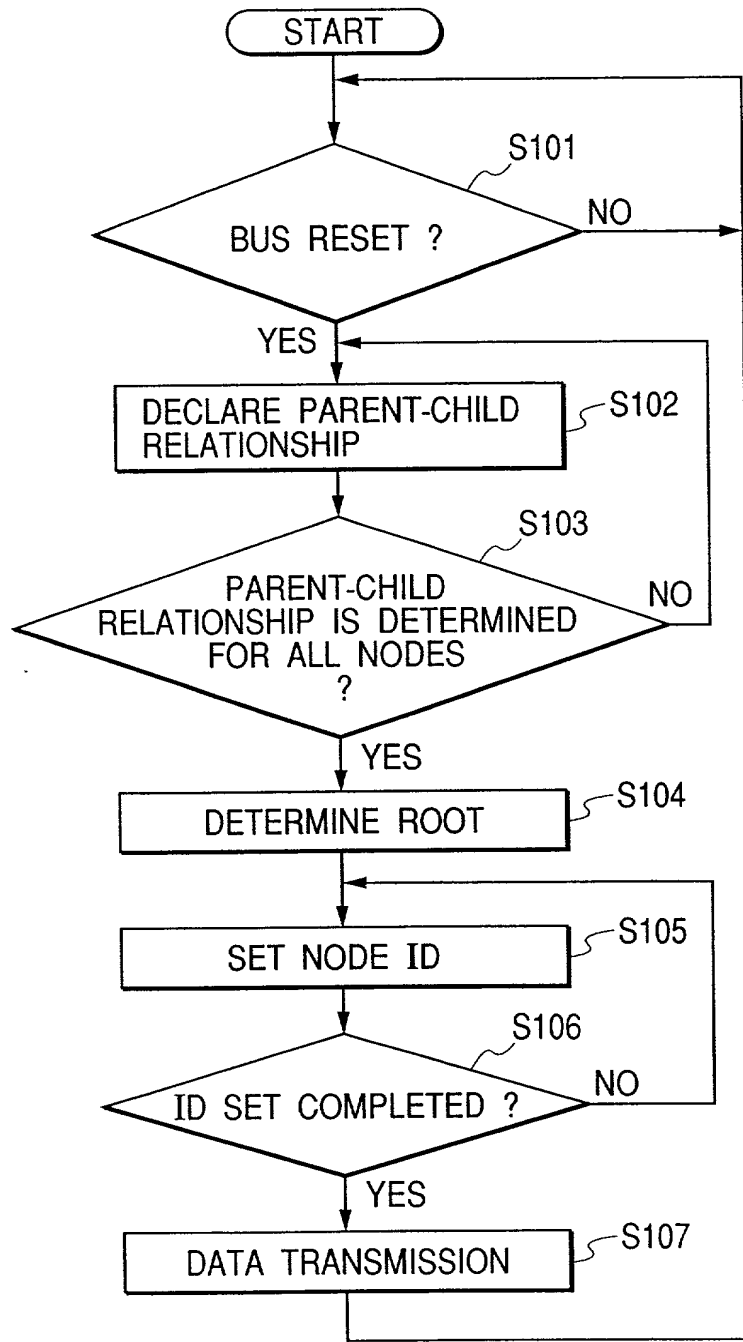

**FIG. 16**


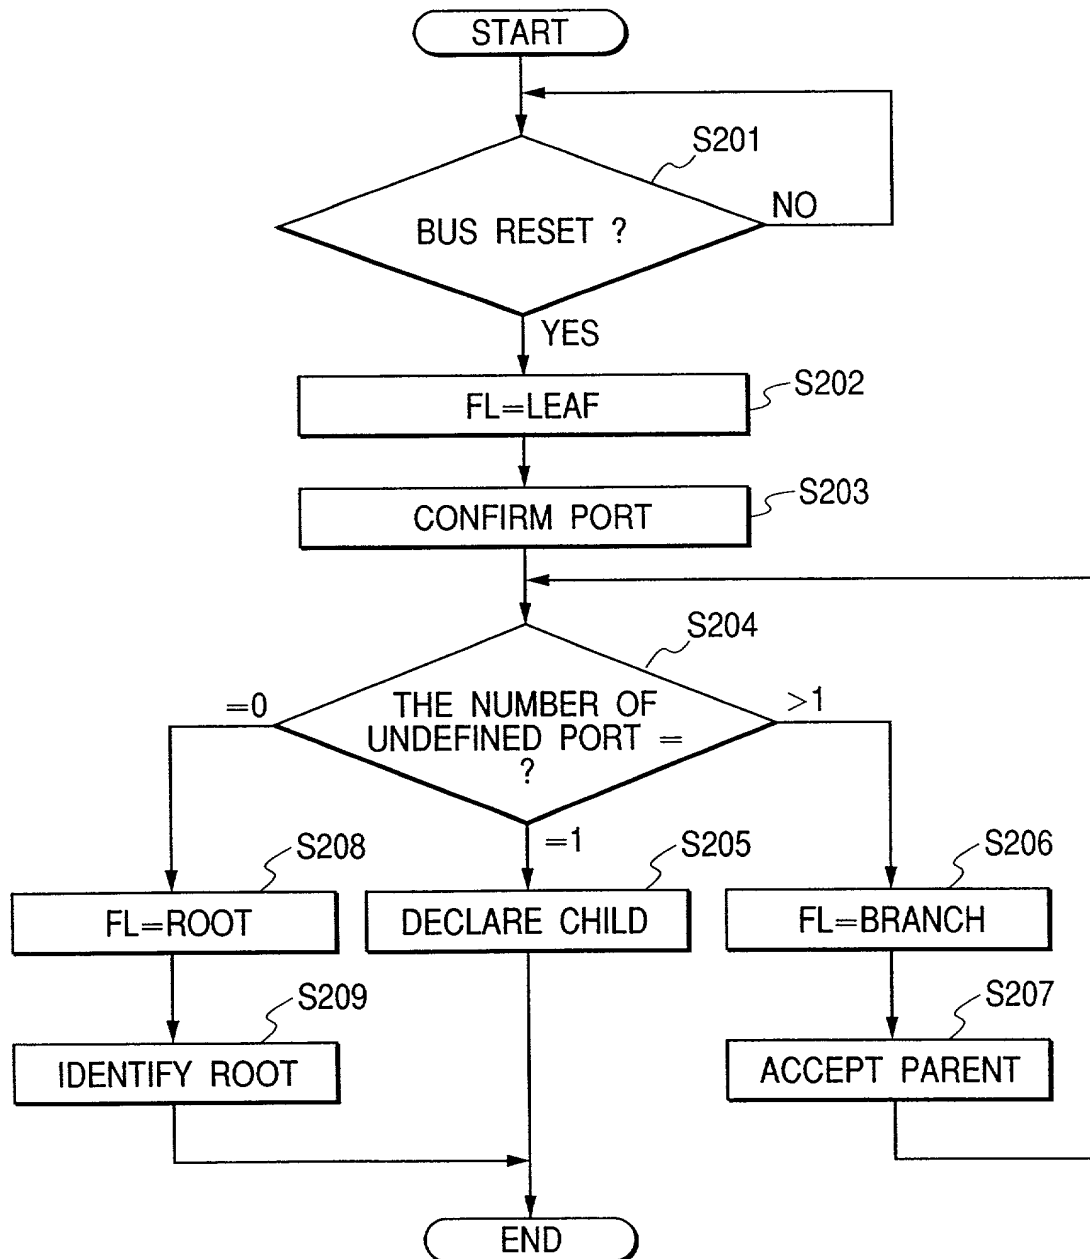
**FIG. 17**



FIG. 18

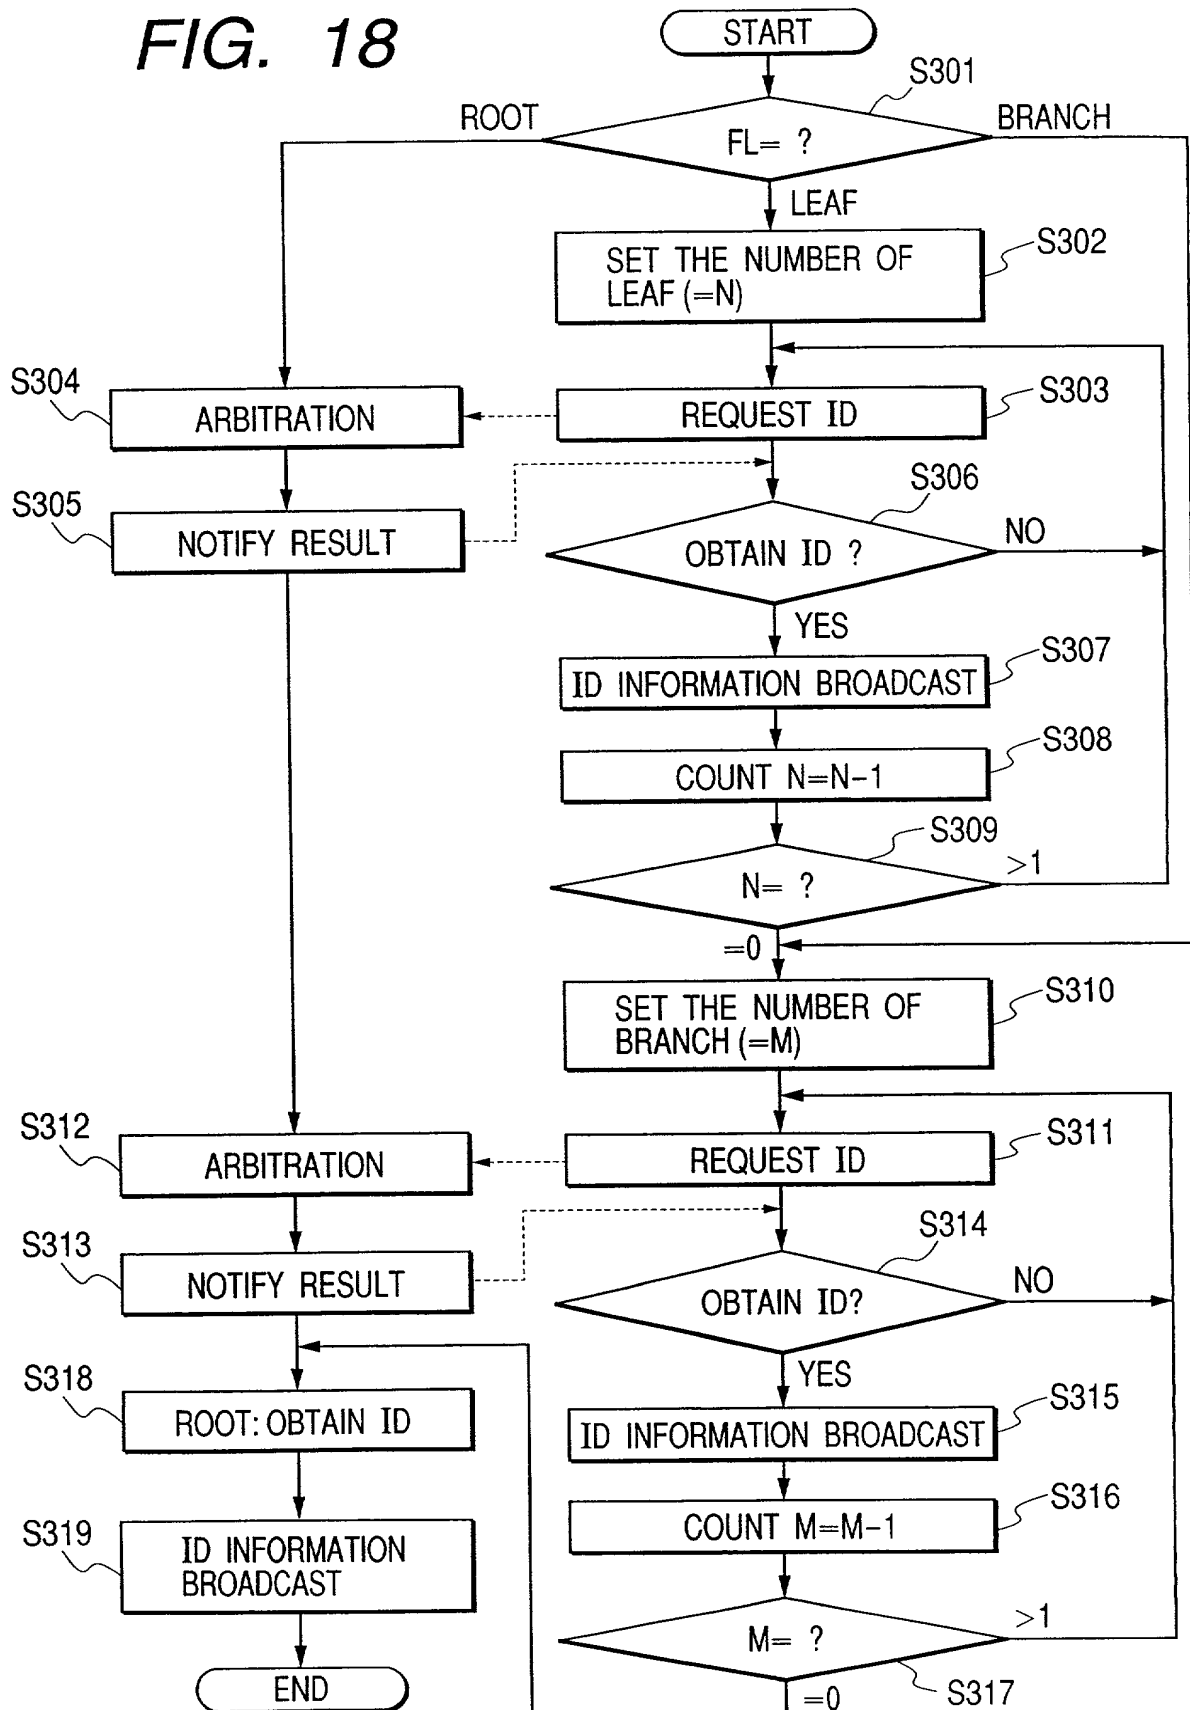

**FIG. 19**